



EAN: 4015474271623
static.hansa.com/01262183

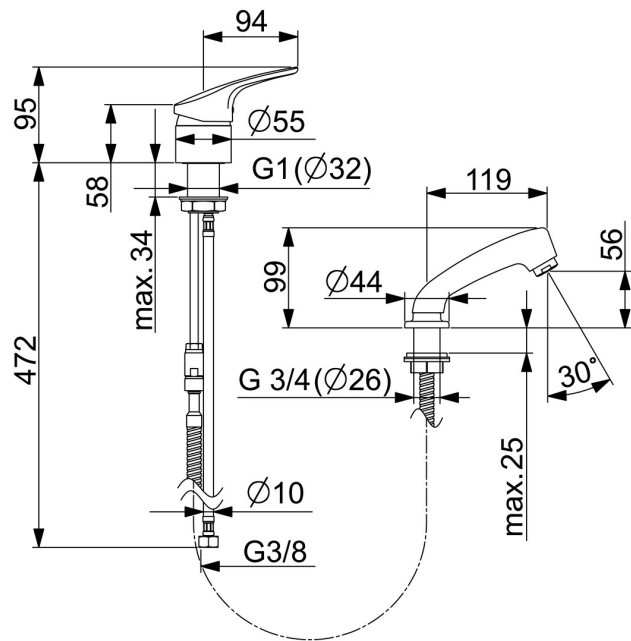

- Public & Semi-public
- Single-lever
- Deck mounted
- Chrome
- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- Hand shower, Shower hose (1250 mm)
- Pull-out hand spray
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- Non-return valve(s), $\varnothing$ 48 mm ceramic eco cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- Round rosette, Sleeve
- protected against back-flow in domestic use (according to DIN EN 1717)

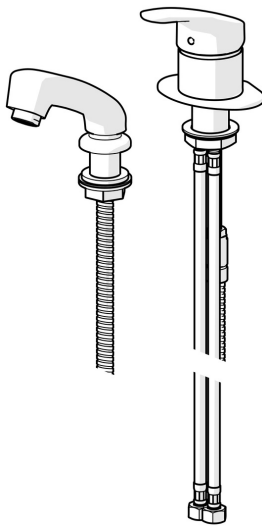

Technical data

Flow properties

Eco-flow at 3 bar	6.0 l/min
Flow-rate at 3 bar	12.0 l/min

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	Ø 10 mm
Backflow prevention (EN1717)	EB

Regulations


EN standard	EN 817, EN 1112, EN 1113
-------------	--------------------------

Approvals and Declarations

KIWA	K6116/08
------	----------

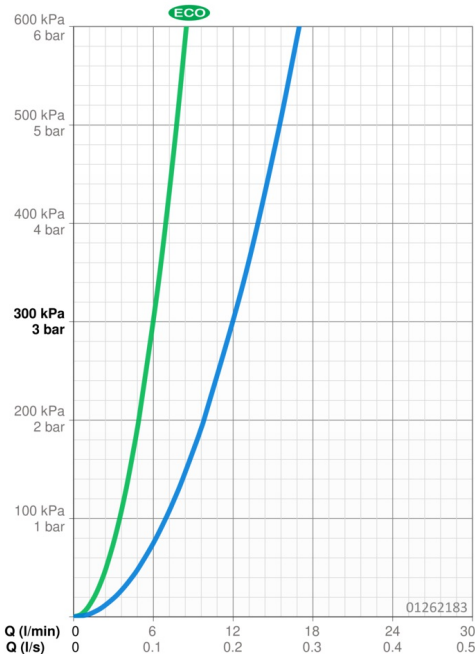

Spare parts

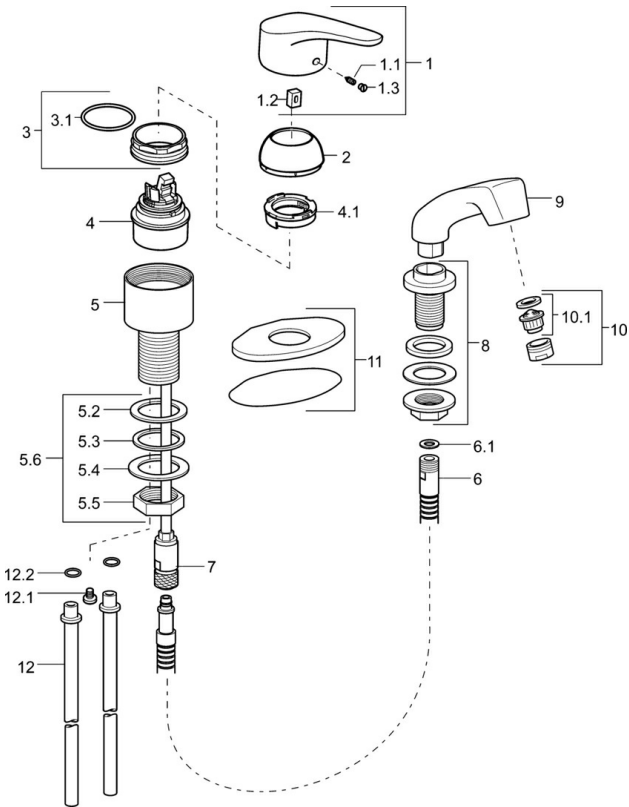

SP01262183

	Name	Code
1	Lever, L=93 mm	01880083
1.1	Screw, M5x8, SW2.5	59904755
1.2	Bushing	59904778
1.3	Symbol plug Grey	59912112
2	Covering cap	59912638
3	Eye screw, M50x1, SW45	59904775
3.1	O-ring, d 43x2.5	59911166
4	Cartridge, 4.8 eco	59904601
4.1	Hot water limiter	59904759
5.2	Gasket, 41.5x33.3x2	59902295
5.3	Gasket, 48x33.5x2	59902283
5.6	Fixing set Discontinued	59912347
6	Hose, L=1250	59902137
6.1	Gasket, 13.5x8x1	59902311
7	Nipple	59912074
8	Passing-through bushing	59910055
9	Hand shower	59910054
10	Aerator, M24x1 STD HC B	59905830
10.1	Aerator, M22/M24 B	59905901
11	Cover flange	59911328
12	Flexible pipe, L=430, G3/8-M8x1	59913964
12	Pipe, d 10 mm, L=413	59911423
12.1	Attachment clamp Discontinued	59911416
12.2	O-ring, 9x2	59905095