



EAN: 4015474137295
static.hansa.com/01546276

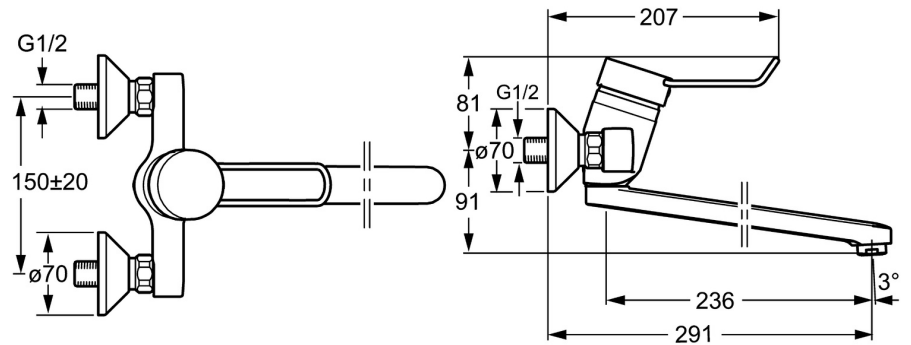

- Health & Care
- Single-lever
- Wall mounted
- Chrome
- Swivel spout, Lockable in the middle position
- Laminar stream
- Long shape, Hot/Cold symbols, Loop shape, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- $\varnothing$ 48 mm ceramic eco cartridge for flow and temperature control
- Eccentric coupling(s), Cover plate(s), with integrated shut-off valve(s), Silencer(s)
- Inner body made of DZR brass, Waterways without nickel coating

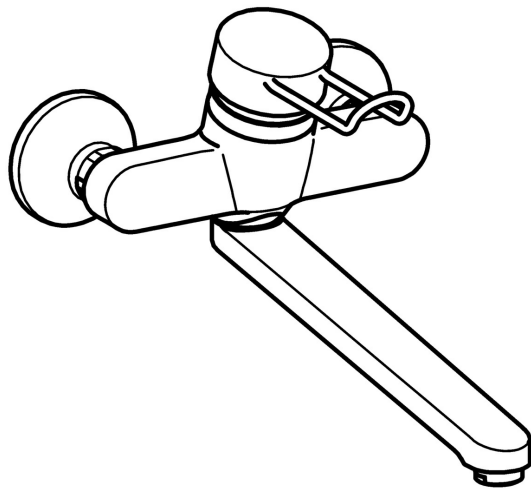

Technical data

Flow properties


Eco-flow at 3 bar	6.0 l/min
Flow-rate at 3 bar	12.0 l/min


Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	0.5-10 bar
Installation width	cc150 ± 20 mm
Projection	291 mm
Material	Brass

Regulations

EN standard	EN 817
Noise class	I (ISO 3822)

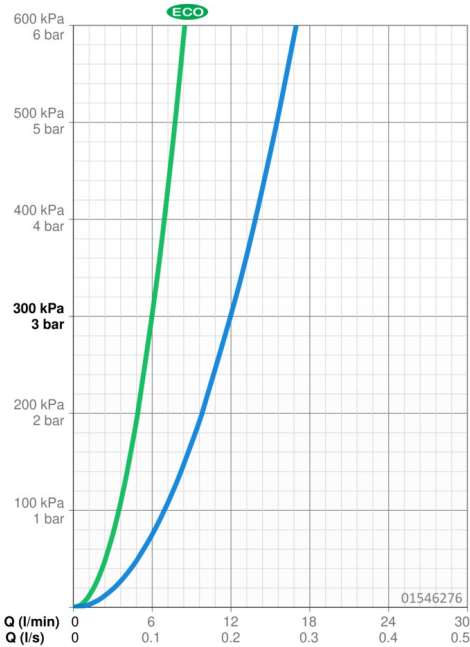



© 2024 Hansa Armaturen GmbH - www.hansa.com - 03.04.2024