


EAN: 4015474259669
static.hansa.com/060822030037

- Washbasin
 - Single-lever
 - Deck mounted
 - Chrome
 - Fixed spout
 - PCA® - constant flow rate regardless of pressure variations, Hidden aerator
- Hot/Cold symbols, Single operating lever/handle
 - Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
 - ø 35 mm ceramic cartridge for flow and temperature control
 - Flexible inlet pipes
 - Rapid installation system
 - Without pop-up waste

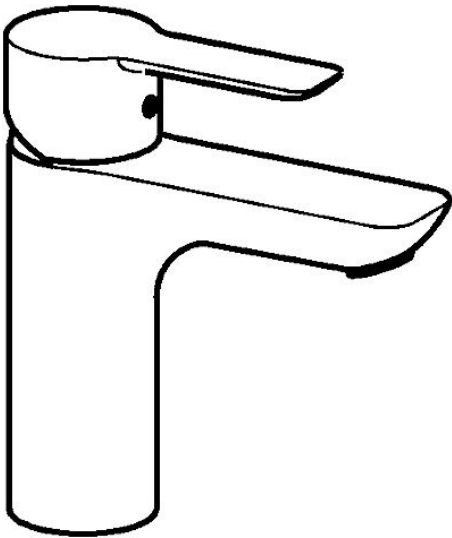

Technical data

Flow properties	
Flow-rate at 3 bar (with flow controller)	6.0 l/min
Technical properties	
DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G3/8
Projection	108 mm
Backflow prevention (EN1717)	AA
Material	Brass
Regulations	
EN standard	EN 817

