



EAN: 4057304014420
static.hansa.com/08866200

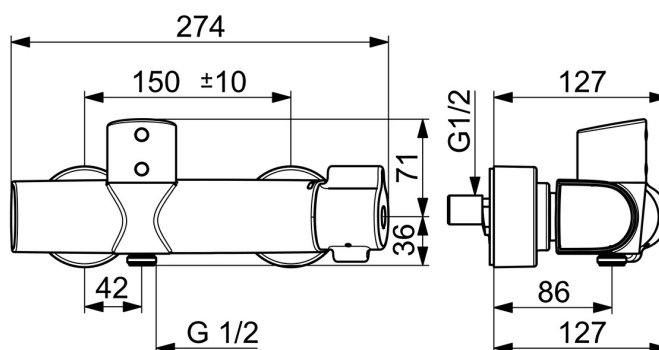

- Health & Care
- Thermostatic, Touchless, Bluetooth®, Battery-operated
- Wall mounted
- Chrome
- Temperature control handle
- The housing of the fittings conducts minimal heat
- Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Autofocus infrared sensor, Solenoid valve, Low battery indicator
- Eccentric coupling(s), Cover plate(s), with integrated shut-off valve(s), Silencer(s), Cover plate triple sealed
- Inner body made of DZR brass, Waterways without nickel coating, Thermal disinfection without cartridge readjustment, Software settings adjustable via App
- Safety lock against scalding 38° C (36°-44°)



Technical data

Flow properties

Flow-rate at 3 bar	12.0 l/min
--------------------	------------

Technical properties

Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G1/2
Installation width	CC150± 10 mm
Backflow prevention (EN1717)	EB
Material	Brass

Software settings

Afterflow period	5 s (1-20 s)
Automatic flush	off (off/1-120 h)
Automatic flush period	30 s (1-1800 s)
Max. flow period	5 min (1 - 1800 s)

Electronic properties

Battery	Lithium 2CR5 6 V
Bluetooth version	4.x (D034445)

Regulations


EU Directives	C € Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	EN 1111 , EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4
Noise class	I (ISO 3822)
Noise class 0.2 l/s	I (ISO 3822)
Protection class	IP 55

Approvals and Declarations


DVGW	CW-6515DL0555
UN38.3	UN38-3 Maxell 2CR5
Declaration of conformity	RED
EPD	S-P-06397

Sustainability

EPD module A1 (kg CO2 eq.)	12,75
EPD module A2 (kg CO2 eq.)	0,60
EPD module A3 (kg CO2 eq.)	1,47
EPD module A1-A3 (kg CO2 eq.)	14,81
EPD module A4 (kg CO2 eq.)	0,53
EPD module B7 (kg CO2 eq.)	2110,00
EPD module C2 (kg CO2 eq.)	0,03
EPD module C3 (kg CO2 eq.)	0,03
EPD module C4 (kg CO2 eq.)	1,05
EPD module D (kg CO2 eq.)	-9,40

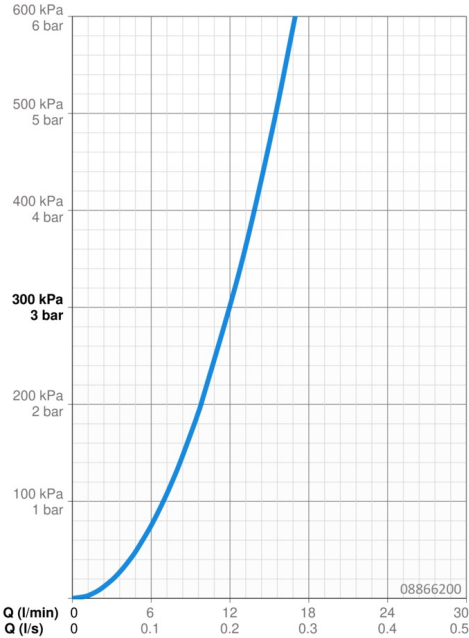

Spare parts

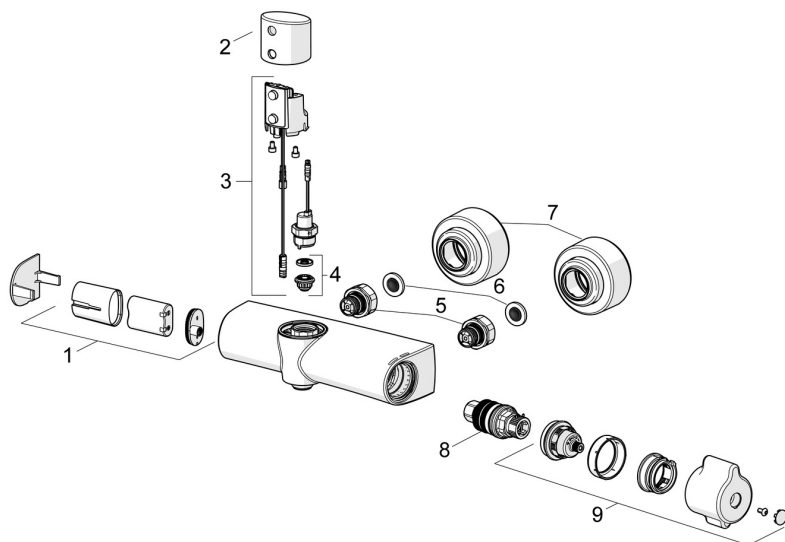




SP08866200

	Name	Code
01	Battery casing	59914154
02	Sensor holder	1006102V
03	Update kit	1017251V
04	Membrane for solenoid valve	1006500V
05	Combiner	59914472
06	Filter sealing, G3/4	59911076
07	Cover flange	1006473V
08	Thermostatic cartridge, 3.4	59914114
09	Temperature control handle	1006058V

EAN: 4057304014437
static.hansa.com/08866201



- Health & Care
- Thermostatic, Touchless, Bluetooth®, Battery-operated
- Wall mounted
- Chrome
- Detachable spout, Swivel spout, Lockable in the middle position, Profile construction
- Laminar stream
- Temperature control handle
- The housing of the fittings conducts minimal heat
- Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Autofocus infrared sensor, Solenoid valve, Low battery indicator
- Eccentric coupling(s), Cover plate(s), with integrated shut-off valve(s), Silencer(s), Cover plate triple sealed
- Inner body made of DZR brass, Waterways without nickel coating, Thermal disinfection without cartridge readjustment, Software settings adjustable via App
- Safety lock against scalding 38°C (36°-44°)

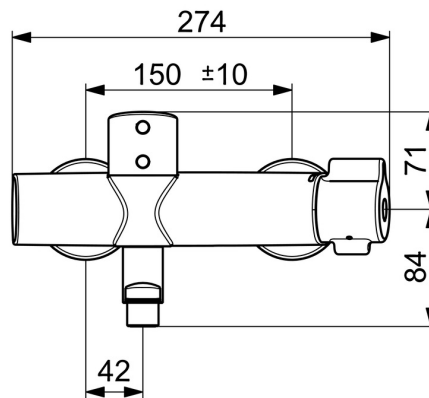

Technical data

Flow properties

Flow-rate at 3 bar

9.6 l/min

Technical properties

Hot water supply

max. +70°C

Working pressure

1-10 bar

Connection size

G1/2

Installation width

CC150± 10 mm

Projection

186 mm

Backflow prevention (EN1717)

AA

Material

Brass

Software settings

Afterflow period

2 s (1-20 s)

Automatic flush

off (off/1-120 h)

Automatic flush period

30 s (1-1800 s)

Max. flow period

2 min (1 - 1800 s)

Electronic properties

Battery

Lithium 2CR5 6 V

Bluetooth version

4.x (D034445)

Regulations

EU Directives

C € Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU

EN standard

EN 1111 , EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A14+A14+A2+A15:2021, Part 19.11.4

Noise class

I (ISO 3822)

Protection class

IP 55

Approvals and Declarations

DVGW


CW-6515DL0555

UN38.3


UN38-3 Maxell 2CR5

Declaration of conformity

RED

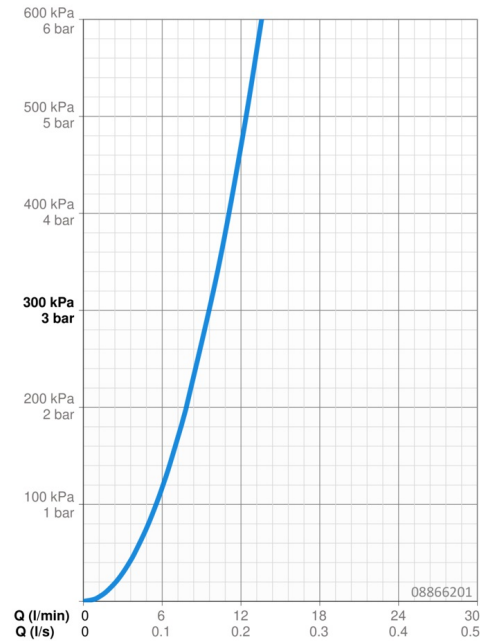

Spare parts

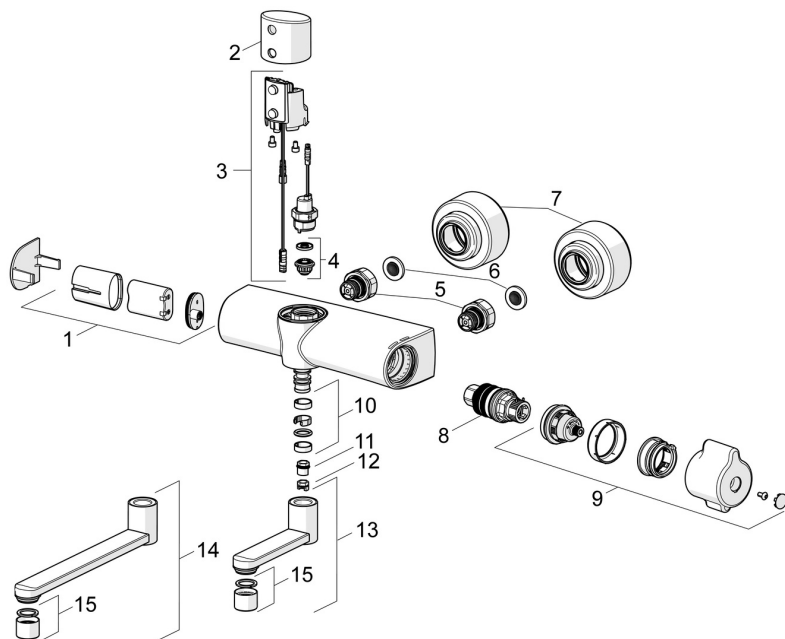



SP08866201

	Name	Code
01	Battery casing	59914154
02	Sensor holder	1006102V
03	Update kit	1017251V
04	Membrane for solenoid valve	1006500V
05	Combiner	59914472
06	Filter sealing, G3/4	59911076
07	Cover flange	1006473V
08	Thermostatic cartridge, 3.4	59914114
09	Temperature control handle	1006058V
10	Sealing kit for spout	59914720
11	Spout overturning stopper, 60°/0°	59914264
12	Limiter, 120°	59914728
13	Spout, L=100	59914658
14	Spout, L=200	59914659
15	Aerator, M22x1 STD PL HC A Laminar	59914732

EAN: 4057304014444
static.hansa.com/08866202



- Health & Care
- Thermostatic, Touchless, Bluetooth®, Battery-operated
- Wall mounted
- Chrome
- Detachable spout, Swivel spout, Lockable in the middle position, Profile construction
- Laminar stream
- Temperature control handle
- The housing of the fittings conducts minimal heat
- Thermostatic cartridge for automatic temperature control, Non-return valve(s), Litter filter(s)
- Autofocus infrared sensor, Solenoid valve, Low battery indicator
- Eccentric coupling(s), Cover plate(s), with integrated shut-off valve(s), Silencer(s), Cover plate triple sealed
- Inner body made of DZR brass, Waterways without nickel coating, Thermal disinfection without cartridge readjustment, Software settings adjustable via App
- Safety lock against scalding 38°C (36°-44°)

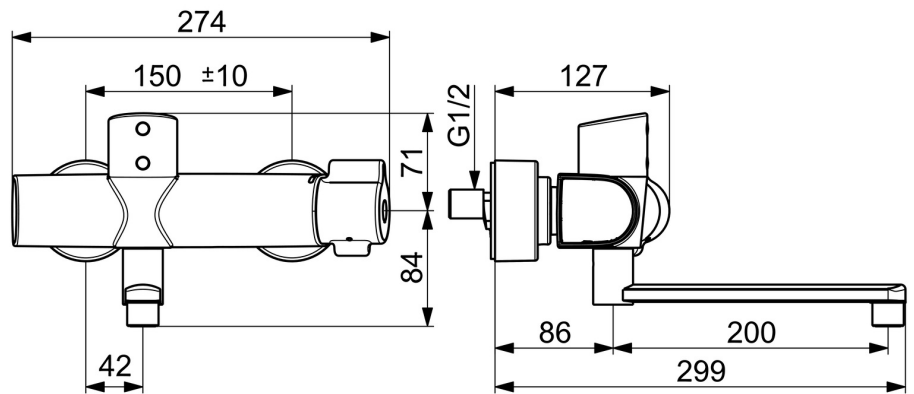

Technical data

Flow properties

Flow-rate at 3 bar

9.6 l/min

Technical properties

Hot water supply

max. +70°C

Working pressure

1-10 bar

Connection size

G1/2

Installation width

CC150± 10 mm

Projection

286 mm

Backflow prevention (EN1717)

AA

Material

Brass

Software settings

Afterflow period

2 s (1-20 s)

Automatic flush

off (off/1-120 h)

Automatic flush period

30 s (1-1800 s)

Max. flow period

2 min (1 - 1800 s)

Electronic properties

Battery

Lithium 2CR5 6 V

Bluetooth version

4.x (D034445)

Regulations

EU Directives

C € Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU

EN standard

EN 1111 , EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A14+A14+A2+A15:2021, Part 19.11.4

Noise class

I (ISO 3822)

Protection class

IP 55

Approvals and Declarations

DVGW


CW-6515DL0555

UN38.3


UN38-3 Maxell 2CR5

Declaration of conformity

RED

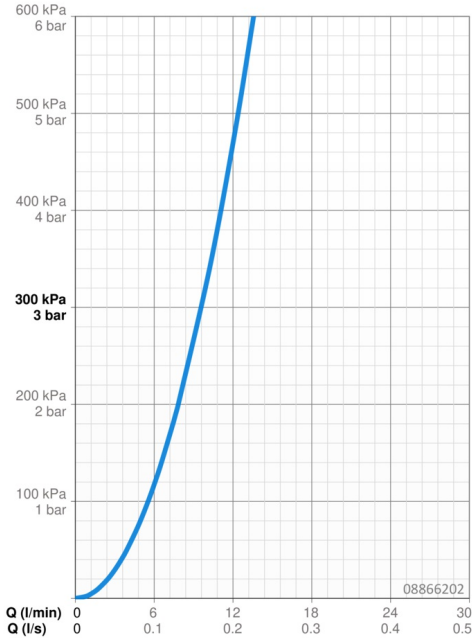

Spare parts

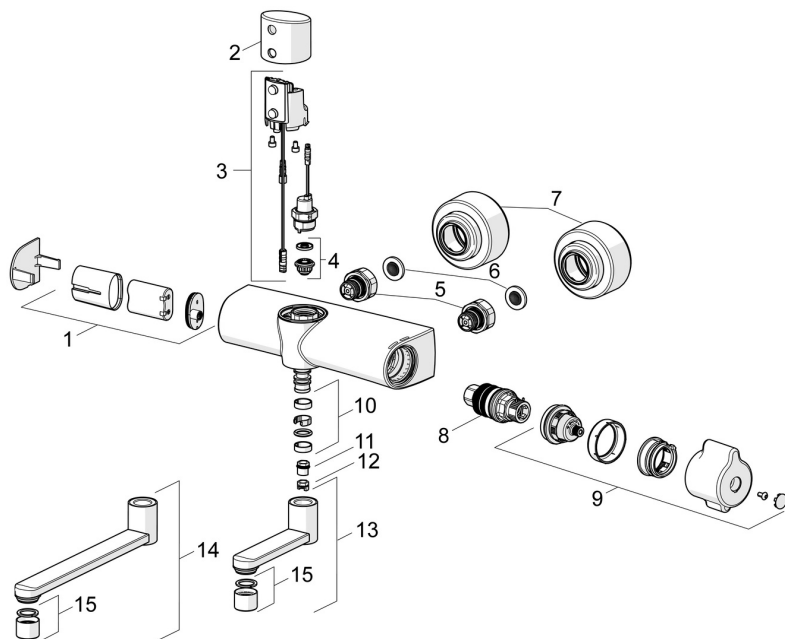

SP08866201

	Name	Code
01	Battery casing	59914154
02	Sensor holder	1006102V
03	Update kit	1017251V
04	Membrane for solenoid valve	1006500V
05	Combiner	59914472
06	Filter sealing, G3/4	59911076
07	Cover flange	1006473V
08	Thermostatic cartridge, 3.4	59914114
09	Temperature control handle	1006058V
10	Sealing kit for spout	59914720
11	Spout overturning stopper, 60°/0°	59914264
12	Limiter, 120°	59914728
13	Spout, L=100	59914658
14	Spout, L=200	59914659
15	Aerator, M22x1 STD PL HC A Laminar	59914732