



EAN: 4057304015809
static.hansa.com/0955220333

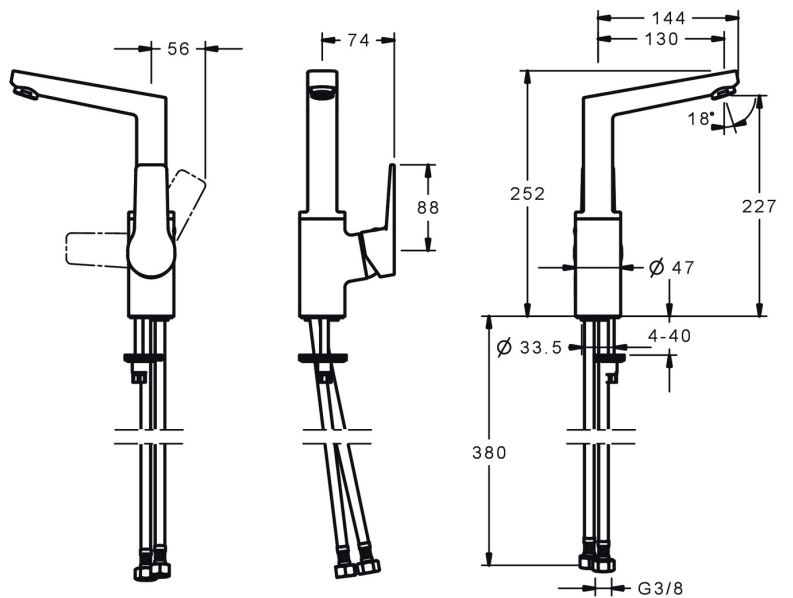

- Washbasin
- Single-lever, side operated
- Deck mounted
- Matt black
- Swivel spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system
- Without pop-up waste, Without draw-rod opening

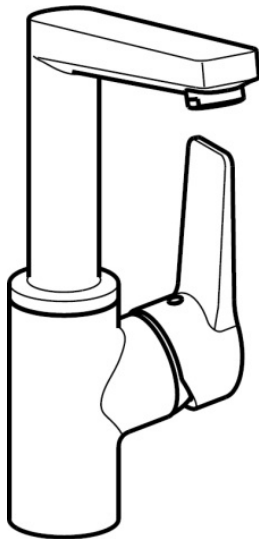

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	6.0 l/min
Pressure loss with flow (0.1 l/s)	2 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	130 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

DVGW	NW-6506CQ0410
ABP	PA-IX 38405/IO
Declaration of conformity	DoC

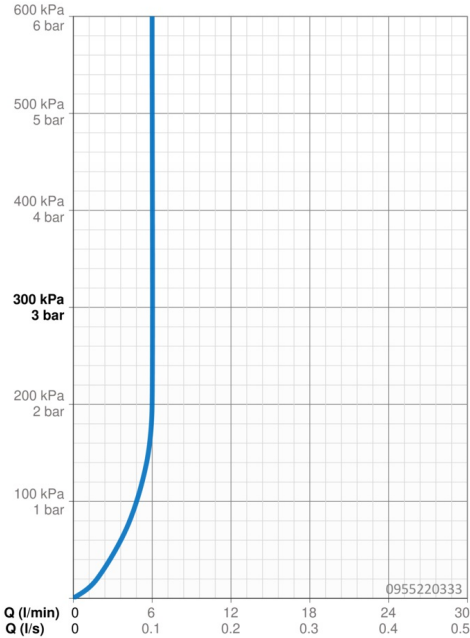

Spare parts

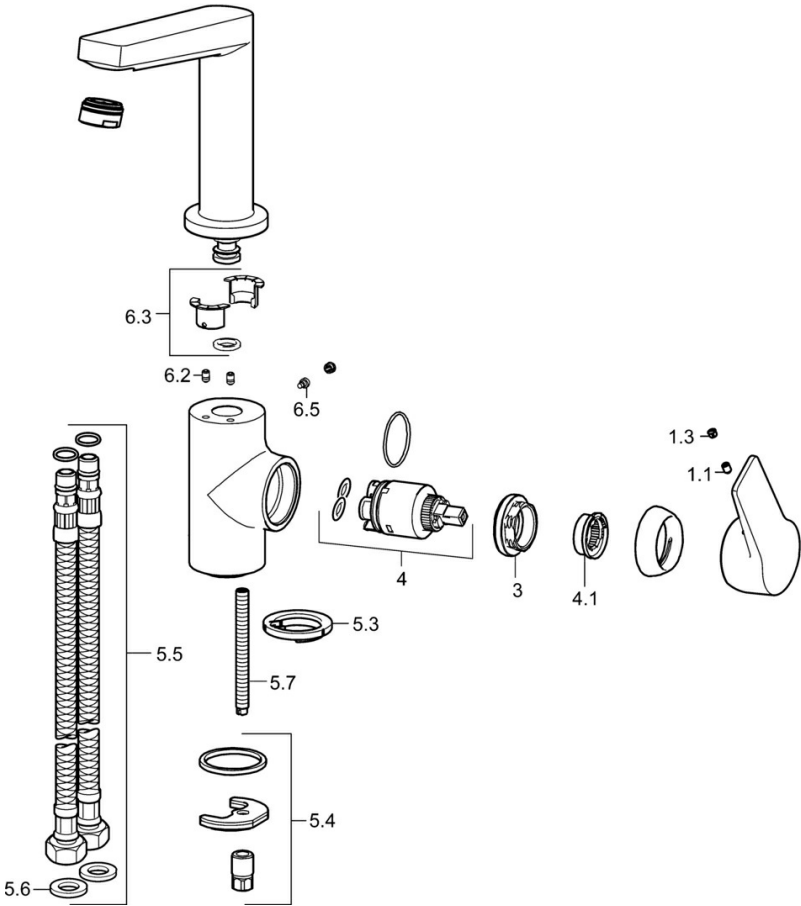



SP0955220333

	Name	Code
1.1	Screw, M5x8, SW2.5	59904755
1.3	Symbol plug Grey	59912112
3	Tightening nut, M40x1	1003409V
4	Cartridge, 3.5 Classic	59913075
4.1	Temperature adjustment limiter	59912325
5.3	Bottom seal	59914591
5.4	Fixing set	59910749
5.5	Flexible pipe, L=430, G3/8-M8x1	59913964
5.6	Gasket, 9.5x14.4x2	59912551
5.7	Fixing screw, M8x1, L=140	59912474
6.2	Fixing screw, M4x8	59913989
6.3	Sealing kit	59911884
6.5	Screw, M4x7	59902075

EAN: 4057304015694
static.hansa.com/4467013333



- Shower solutions
- Wall mounted
- Matt black
- Hand shower, Shower rail, Adjustable shower rail bracket, Soap dish, Shower hose (1750 mm), Anti limescale technology (easy to clean)
- Normal - Even and soft water stream, Refreshing - Strong water stream, activates and refreshes body, Relaxing - Soft water stream, pleasant for entire body
- 3 spray functions

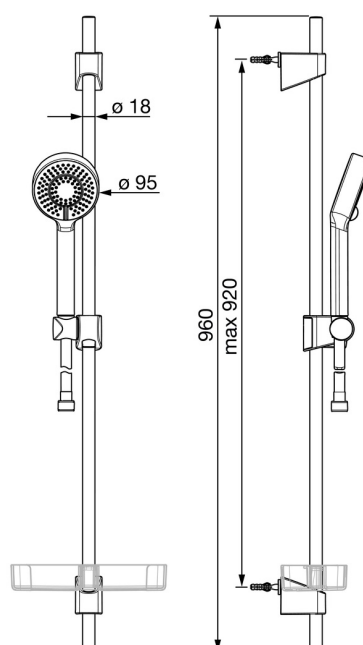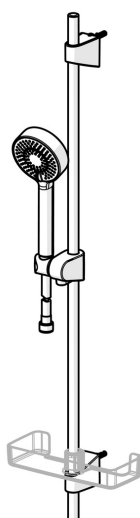

Technical data

Flow properties

Eco-flow at 3 bar	9.0 l/min
Flow-rate at 3 bar	18.0 l/min
Flow-rate at 3 bar (with flow controller)	15.0 l/min

Technical properties

Hot water supply	max. +65°C
Working pressure	0.5-5 bar
Connection size	G1/2
Diameter	18 mm
Length / Height	920 mm

Regulations


EN standard	EN 1112, EN 1113
-------------	------------------

Approvals and Declarations

Declaration of conformity	DoC
EPD	S-P-06395

Sustainability



EPD module A1 (kg CO2 eq.)	5,26
EPD module A2 (kg CO2 eq.)	0,26
EPD module A3 (kg CO2 eq.)	0,61
EPD module A1-A3 (kg CO2 eq.)	6,13
EPD module A4 (kg CO2 eq.)	0,26
EPD module B7 (kg CO2 eq.)	1582,50
EPD module C2 (kg CO2 eq.)	0,01
EPD module C3 (kg CO2 eq.)	0,00
EPD module C4 (kg CO2 eq.)	1,63
EPD module D (kg CO2 eq.)	-0,68

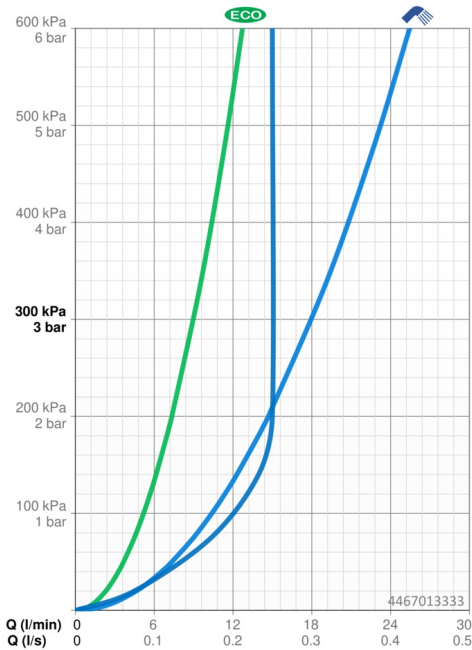

EAN: 4057304015724
static.hansa.com/5815017133



- Shower solutions
- Thermostatic
- Wall mounted
- Matt black
- Temperature control handle, Flow control handle, Eco feature for water flow, Safety feature for water temperature
- Eco flow control
- The housing of the fittings conducts minimal heat, Safety stop against scalding at 38°C
- Ceramic head part for flow control, Non-return valve(s), Litter filter(s), Thermostatic cartridge for automatic temperature control
- Eccentric coupling(s)
- Inner body made of DZR brass
- protected against back-flow in domestic use (according to DIN EN 1717)

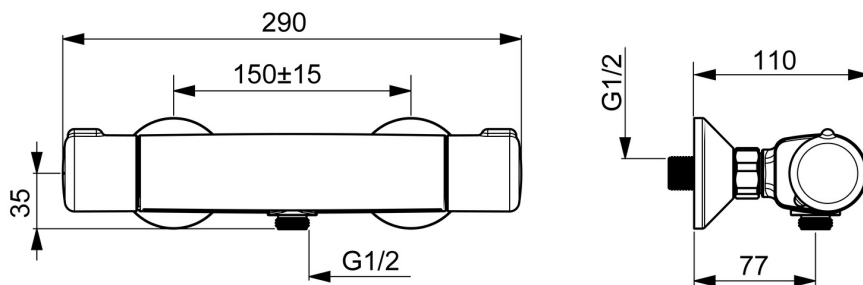

Technical data

Flow properties

Eco-flow at 3 bar	11.4 l/min
Flow-rate at 3 bar	19.2 l/min

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	1-10 bar
Connection size	G1/2
Installation width	cc150 ± 15 mm
Backflow prevention (EN1717)	EB
Material	Brass

Regulations


EN standard	EN 1111
Noise class	I (ISO 3822)

Approvals and Declarations

ABP	PA-IX 38490/IB
Declaration of conformity	DoC
EPD	S-P-06397

Sustainability


EPD module A1 (kg CO2 eq.)	9,36
EPD module A2 (kg CO2 eq.)	0,44
EPD module A3 (kg CO2 eq.)	1,08
EPD module A1-A3 (kg CO2 eq.)	10,87
EPD module A4 (kg CO2 eq.)	0,39
EPD module B7 (kg CO2 eq.)	2004,50
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,77
EPD module D (kg CO2 eq.)	-6,90

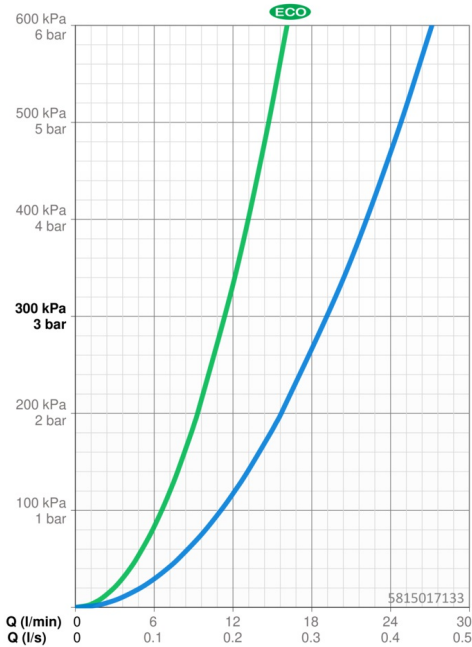

Spare parts

SP5815017133




	Name	Code
2	Headpart, G1/2	59914111
3	Filter sealing, G3/4	59911076
5	O-ring kit	59914113
6	Thermostatic cartridge, 3.4	59914114

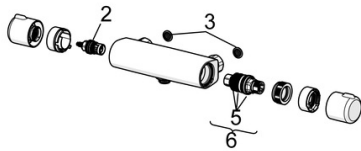

EAN: 4057304015731
static.hansa.com/5816217133



- Bathtub & Shower
- Thermostatic
- Wall mounted
- Matt black
- Fixed spout
- Standard aerator
- Temperature control handle, Flow control handle, Eco feature for water flow, Safety feature for water temperature
- Turn operated diverter, Integrated into flow control handle
- Eco flow control
- The housing of the fittings conducts minimal heat, Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Litter filter(s), Ceramic head part for flow control
- Eccentric coupling(s)
- Inner body made of DZR brass
- protected against back-flow in domestic use (according to DIN EN 1717)

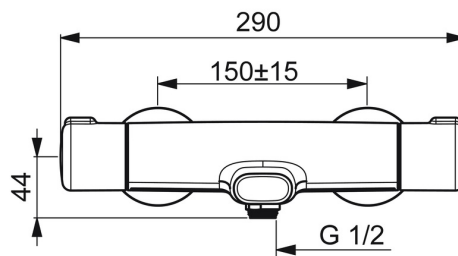

Technical data

Flow properties

Eco-flow at 3 bar	9.6 l/min
Flow-rate at 3 bar	20.4 / 19.2 l/min

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +80°C
Working pressure	1-10 bar
Connection size	G1/2
Installation width	cc150 ± 15 mm
Projection	159 mm
Backflow prevention (EN1717)	EB
Material	Brass/Plastic

Regulations


EN standard	EN 1111
Noise class	II (ISO 3822)

Approvals and Declarations


ABP	PA-IX 10129/II0B
Declaration of conformity	DoC
EPD	S-P-06397

Sustainability

EPD module A1 (kg CO2 eq.)	8,82
EPD module A2 (kg CO2 eq.)	0,41
EPD module A3 (kg CO2 eq.)	1,02
EPD module A1-A3 (kg CO2 eq.)	10,24
EPD module A4 (kg CO2 eq.)	0,37
EPD module B7 (kg CO2 eq.)	1688,00
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,73
EPD module D (kg CO2 eq.)	-6,50

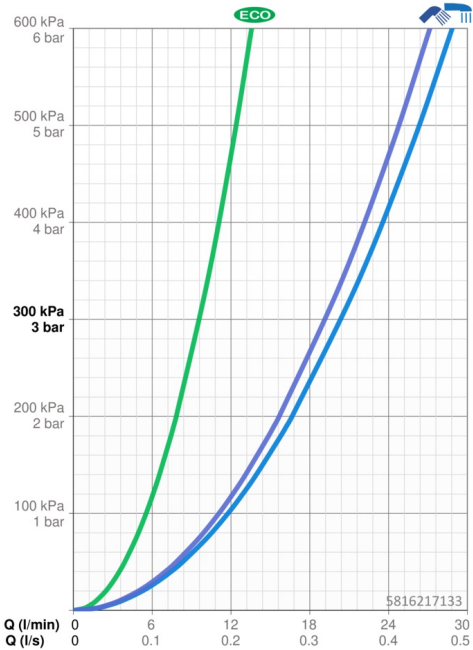

Spare parts

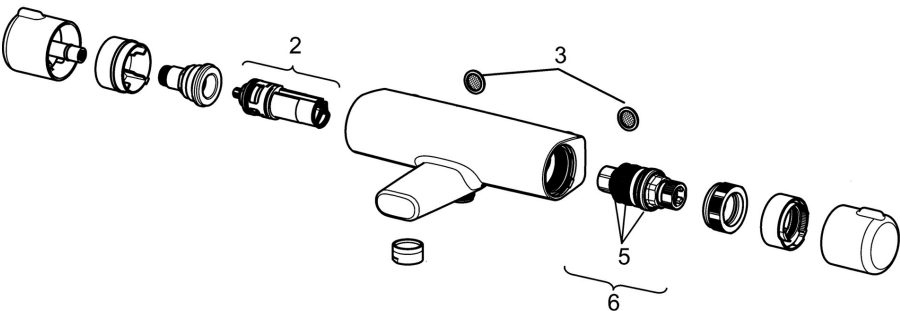

SP5816217133

Name	Code
2 Diverter and cartridge	59914116
3 Filter sealing, G3/4	59911076
5 O-ring kit	59914113
6 Thermostatic cartridge, 3.4	59914114