

44870121 HANSADESIGNO Style - Cover part for bath and shower

faucet Discontinued





trim kit installation set 6.2



- Thermostatic, Trim Kit
- Concealed wall mounting

- Chrome
- Thermostatic cartridge for automatic temperature control
- Square rosette



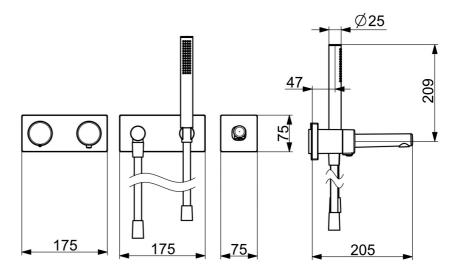



Technical data

Flow properties

Flow-rate at 3 bar

Pressure loss with flow (0.2 l/s)

Pressure loss with flow (0.3 l/s)

3 bar

3 bar

Technical properties

Hot water supply max. +80°C Working pressure 0.5-10 bar Material Brass

Regulations

EN standard EN 1111
Noise class I (ISO 3822)

