



EAN: 4015474279933

static.hansa.com/44870180

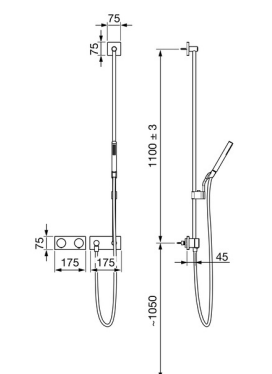

- Shower solutions
- Trim Kit
- Concealed wall mounting
- Chrome
- Thermostatic cartridge for automatic temperature control
- External control unit, Solenoid valve, Power supply, Light indicated function(s)
- Square rosette
- Filling time: 10 min (0 - 20 min)

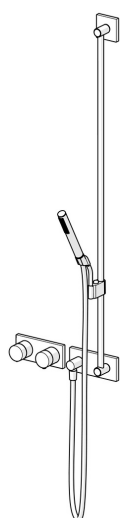

Technical data

Technical properties	
DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Software settings	
Max. flow period	8 min
Electronic properties	
Electrical Connection	230 / 12 V
Regulations	
EU Directives	C € Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A14+A15:2021, Part 19.11.4
Protection class	IP 55 / transformer IP 40
Approvals and Declarations	
Declaration of conformity	LVD