

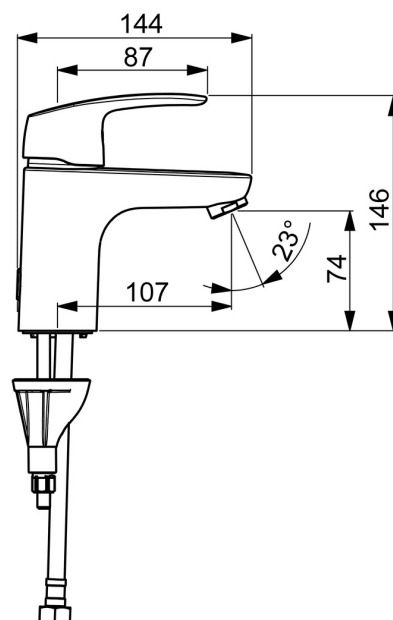


EAN: 4057304018220
static.hansa.com/450622830004

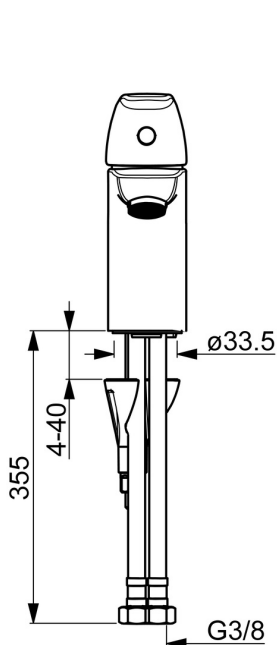

- Industry, ECO Building, Housing
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator, PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting
- Without pop-up waste, Without draw-rod opening



Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	3.4 l/min
---	-----------

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	107 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations


KIWA	K6116/08
DVGW	DW-6506CS0580
ABP	P-IX 29684/IA
EPD	S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.)	6,10
EPD module A2 (kg CO2 eq.)	0,29
EPD module A3 (kg CO2 eq.)	0,58
EPD module A1-A3 (kg CO2 eq.)	6,98
EPD module A4 (kg CO2 eq.)	0,19
EPD module B7 (kg CO2 eq.)	1038,24
EPD module C2 (kg CO2 eq.)	0,01
EPD module C3 (kg CO2 eq.)	0,01
EPD module C4 (kg CO2 eq.)	0,05
EPD module D (kg CO2 eq.)	-4,96

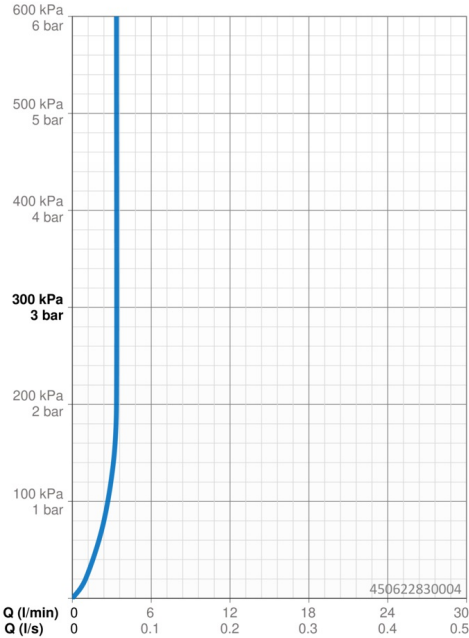

Spare parts

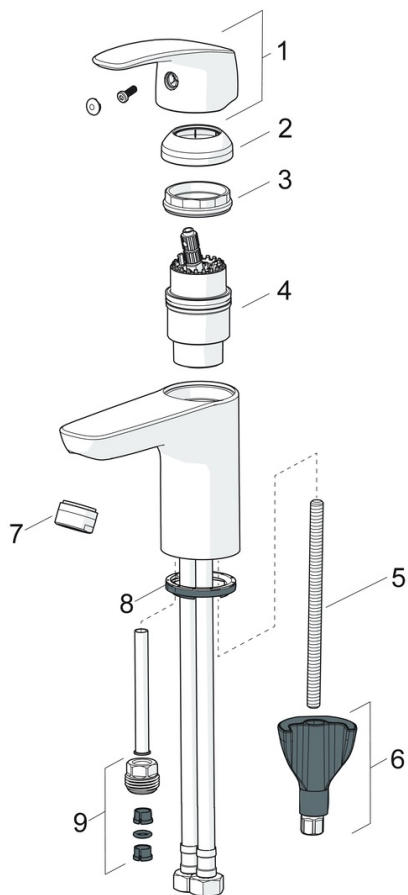

SP45052283

	Name	Code
01	Lever	59914453
02	Covering cap	59914478
03	Tightening nut, M42x1.5, SW 38	59914128
04	Cartridge, 4.0 Classic	59914129
05	Fixing screw, M8x1, L=130	59914474
06	Fixing set	59914475
07	Aerator, M24x1, 6 l/min	59914476
08	Bottom seal	59914591
09	Nipple Discontinued	59914133
N.I.	Flexible pipe, L=375, G3/8-M10x1	59914188
N.I.	Pop-up waste, (2019-)	59914764