

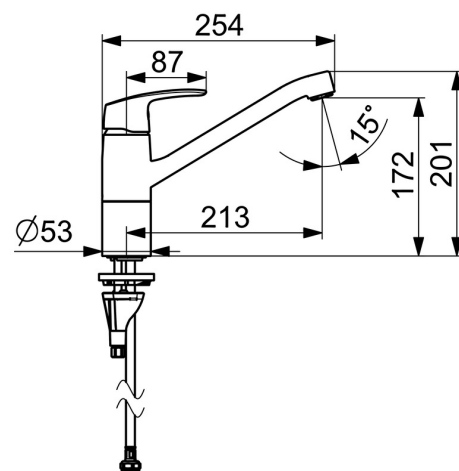


EAN: 4057304018350
static.hansa.com/450822930007

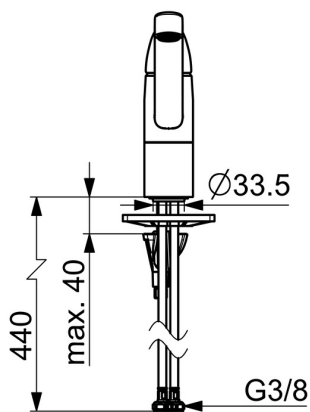

- Industry, ECO Building, Housing
- Single-lever
- Deck mounted
- Chrome
- Swivel spout
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting

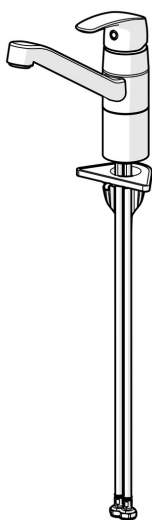

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	7.0 l/min
---	-----------

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	213 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822) Oras lab.

Approvals and Declarations


KIWA	K6116/08
DVGW	DW-6506CS0580
ABP	P-IX 29713/IB
EPD	S-P-06396

Sustainability

EPD module A1 (kg CO2 eq.)	7,50
EPD module A2 (kg CO2 eq.)	0,36
EPD module A3 (kg CO2 eq.)	3,30
EPD module A1-A3 (kg CO2 eq.)	11,15
EPD module A4 (kg CO2 eq.)	0,22
EPD module B7 (kg CO2 eq.)	2742,24
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,34
EPD module D (kg CO2 eq.)	-6,30

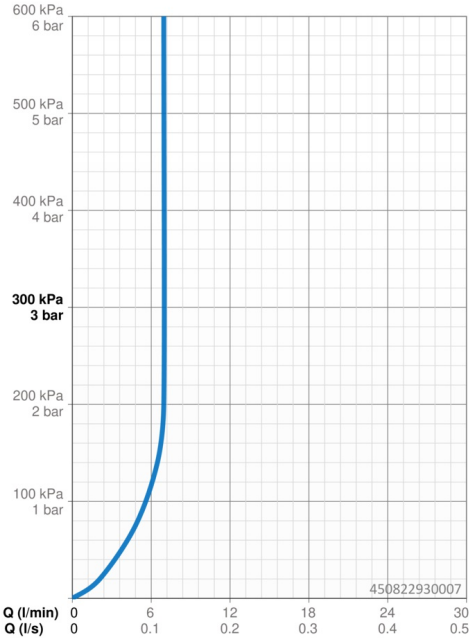

Spare parts

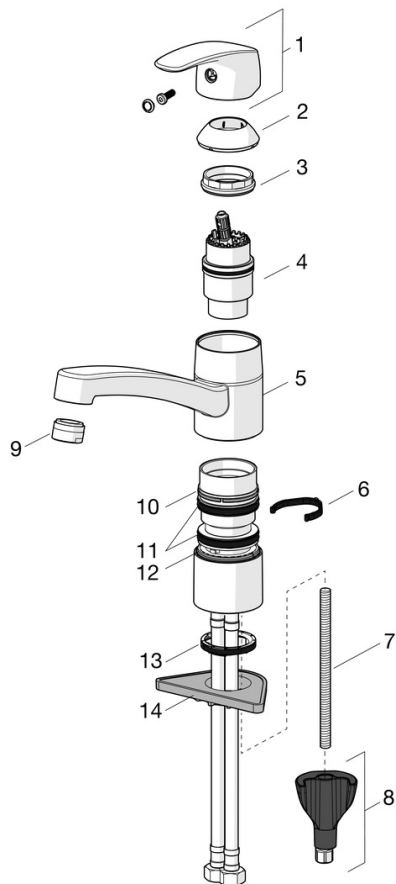

SP45082283

	Name	Code
01	Lever	59914453
02	Covering cap Discontinued	59914482
03	Tightening nut, M42x1.5, SW 38	59914128
04	Cartridge, low pressure, 4.0	59914500
04	Cartridge, 4.0 Classic	59914129
05	Spout, L=210 Discontinued	59914730
06	Spout overturning stopper, 120°	59914489
06	Spout overturning stopper, 40°-80°	59914540
07	Fixing screw, M8x1, L=130	59914474
08	Fixing set	59914475
09	Aerator, M24x1 Discontinued	59914461
09	Aerator, M24x1 Discontinued	59914501
09	Aerator, M24x1 A, low pressure	59902692
10	Bearing ring Discontinued	59914490
11	X-sealing set	59914485
12	Bearing ring	59914486
13	Bottom seal	59914591
14	Supporting plate	59910008