




EAN: 4057304018367
static.hansa.com/452822030004



Kitchen faucet with high spout. Swivel spout and aerator. Spout's swing angle is factory preset at 120° (can be limited to 0° or 60°). There are also in-built limitation options for water temperature and maximum flow-rate.

F = with flexible pipes

- ECO Building
- Single-lever
- Deck mounted
- Chrome
- Swivel spout, Swivel range limiting option
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

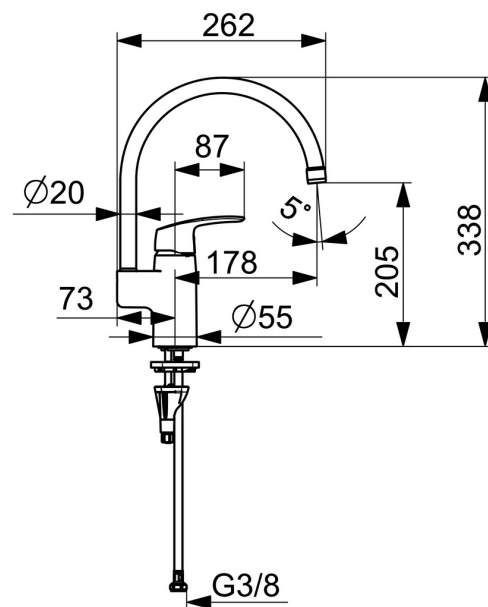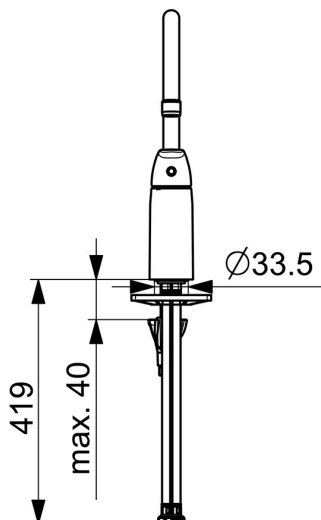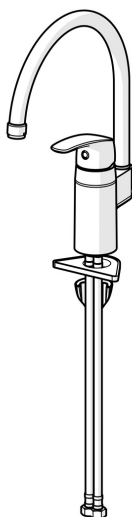

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	3.4 l/min
---	-----------

Technical properties

DN-size (nominal dimension)	DN8
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	178 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations

EN standard	EN 817
Noise class	I (ISO 3822) Oras lab.

Approvals and Declarations

EPD	S-P-06396
-----	-----------

Sustainability

EPD module A1 (kg CO2 eq.)	8,50
EPD module A2 (kg CO2 eq.)	0,41
EPD module A3 (kg CO2 eq.)	3,74
EPD module A1-A3 (kg CO2 eq.)	12,64
EPD module A4 (kg CO2 eq.)	0,25
EPD module B7 (kg CO2 eq.)	1323,84
EPD module C2 (kg CO2 eq.)	0,02
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,38
EPD module D (kg CO2 eq.)	-7,15

