




EAN: 4057304018398
static.hansa.com/452822030005



Kitchen faucet with high spout. Swivel spout and aerator. Spout's swing angle is factory preset at 120° (can be limited to 0° or 60°). There are also in-built limitation options for water temperature and maximum flow-rate.

F = with flexible pipes

- ECO Building, Housing
- Single-lever
- Deck mounted
- Chrome
- Swivel spout, Swivel range limiting option
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

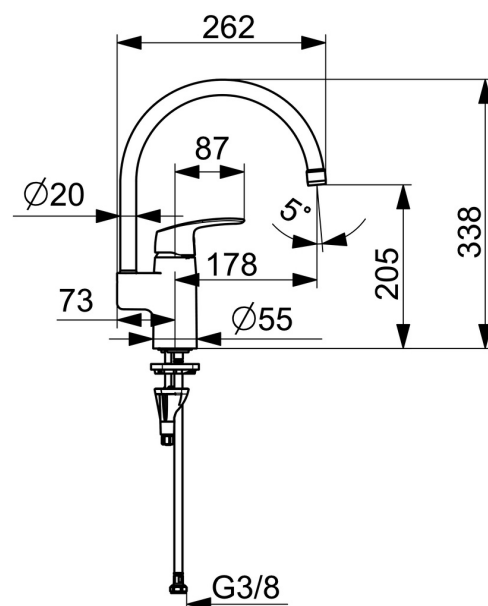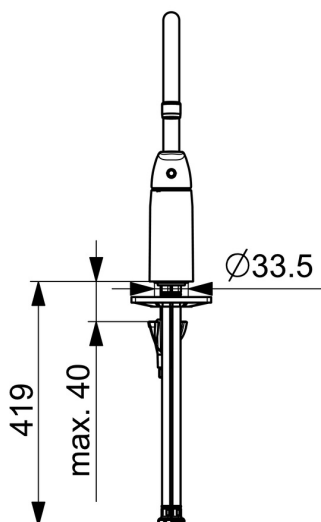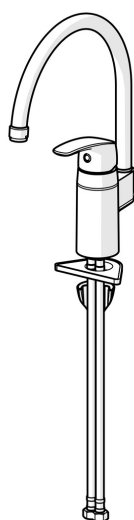

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.2 l/min

Technical properties

DN-size (nominal dimension)

DN8

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

178 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817

Noise class

I (ISO 3822) Oras lab.

Approvals and Declarations

Declaration of conformity

DoC

EPD

S-P-06396

Sustainability

EPD module A1 (kg CO2 eq.)

8,50

EPD module A2 (kg CO2 eq.)

0,41

EPD module A3 (kg CO2 eq.)

3,74

EPD module A1-A3 (kg CO2 eq.)

12,64

EPD module A4 (kg CO2 eq.)

0,25

EPD module B7 (kg CO2 eq.)

1654,80

EPD module C2 (kg CO2 eq.)

0,02

EPD module C3 (kg CO2 eq.)

0,02

EPD module C4 (kg CO2 eq.)

0,38

EPD module D (kg CO2 eq.)

-7,15

