

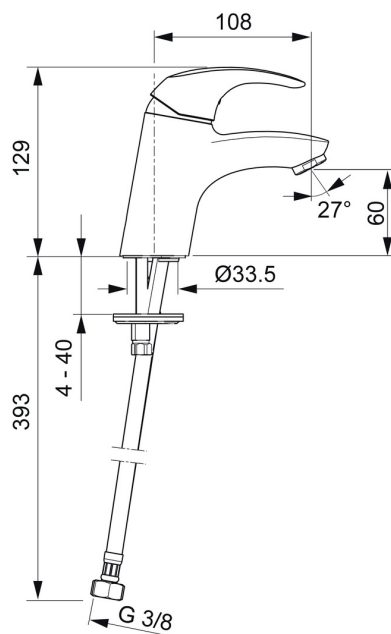


EAN: 4057304002243
static.hansa.com/46062273



- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system
- Without pop-up waste, Without draw-rod opening

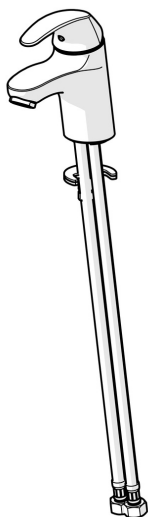

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

6.0 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

1-10 bar

Connection size

G3/8

Projection

108 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817


Noise class

I (ISO 3822)


Approvals and Declarations

KIWA

K6116/08

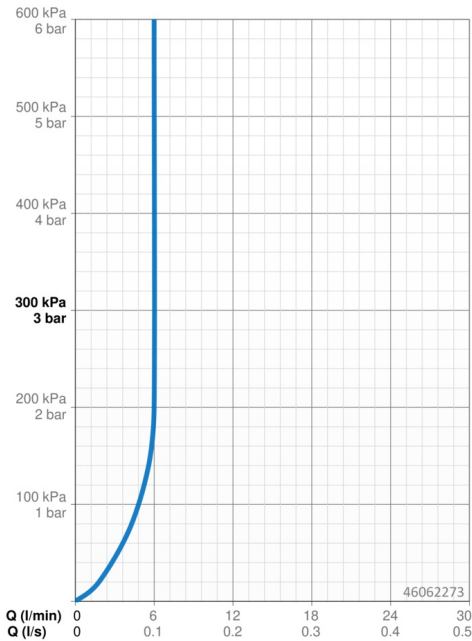

Spare parts

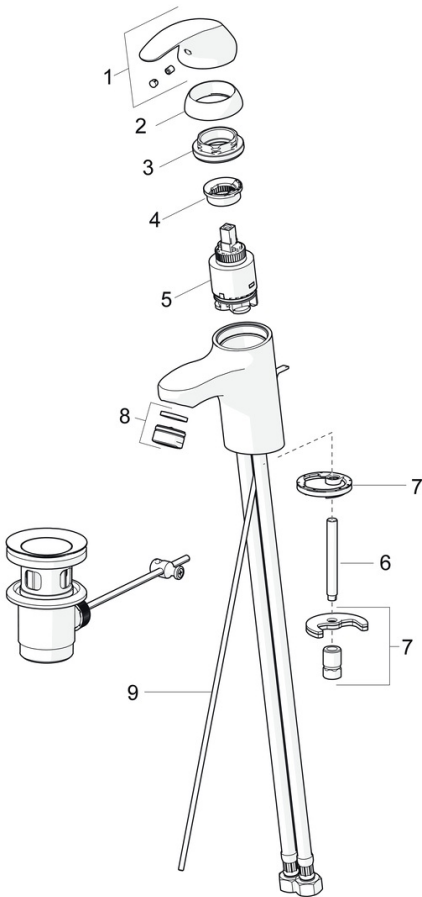

SP46042273

	Name	Code
01	Lever	59913678
02	Covering cap, 33x3 mm	59912504
03	Tightening nut, M40x1	1003409V
04	Temperature adjustment limiter	59912325
05	Cartridge, 3.5 Classic	59913075
06	Fixing screw, M8x1, L=140	59912474
07	Fixing set	59910749
08	Aerator, M24x1, 6 l/min	59913727
09	Pop-up operating rod	59913214
N.I.	Pop-up waste, (2019-)	59914763