

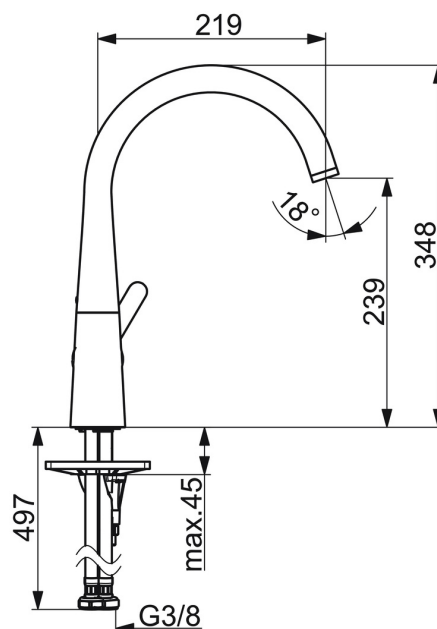


EAN: 4057304020216
static.hansa.com/5101228333

single-lever kitchen mixer, DN 15

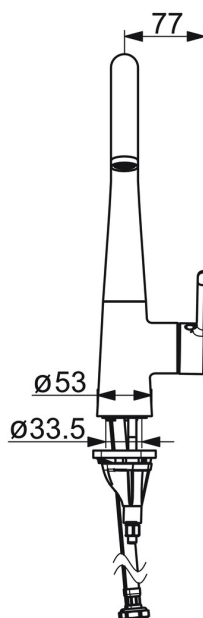

- Kitchen
- Single-lever, side operated
- Deck mounted
- Matt black
- Swivel spout, Swivel range limiting option
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting



Technical data

Flow properties

Flow-rate at 3 bar	12.0 l/min
Pressure loss with flow (0.2 l/s)	3 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	219 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

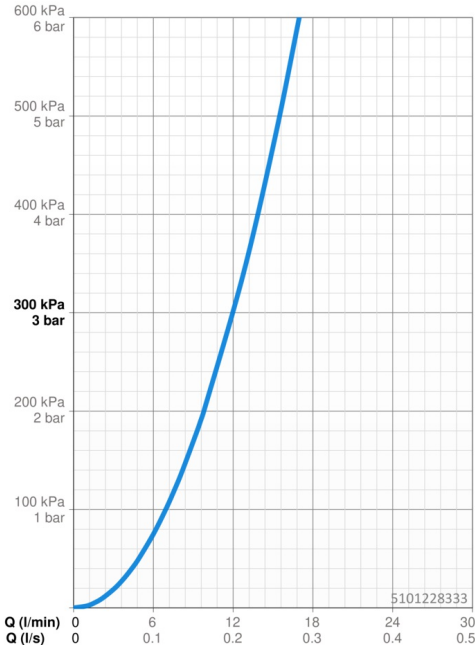

Spare parts

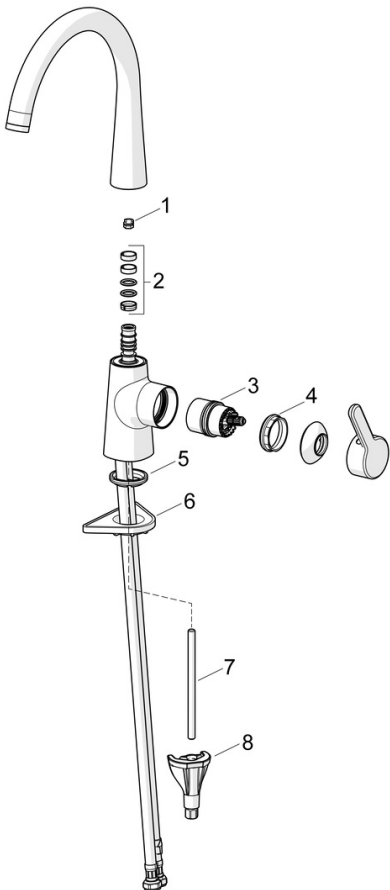

SP51012283CLR




	Name	Code
01	Spout overturning stopper, 60°/0°	59914264
01	Spout overturning stopper, 120° Discontinued	59914429
02	Sealing kit for spout	59914431
03	Cartridge	59914665
04	Tightening nut, M42x1.5, SW 38	59914128
05	Bottom seal	59914591
06	Supporting plate	59910008
07	Fixing screw, M8x1, L=130	59914474
08	Fixing set	59914475

EAN: 4057304020223
static.hansa.com/5101228380

single-lever kitchen mixer, DN 15



- Kitchen
- Single-lever, side operated
- Deck mounted
- Brushed steel
- Swivel spout, Swivel range limiting option
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

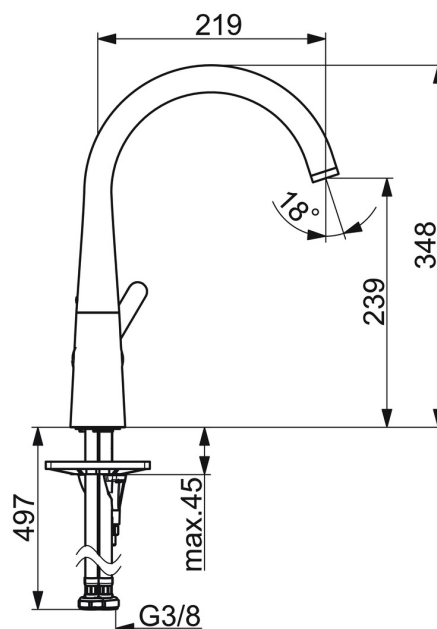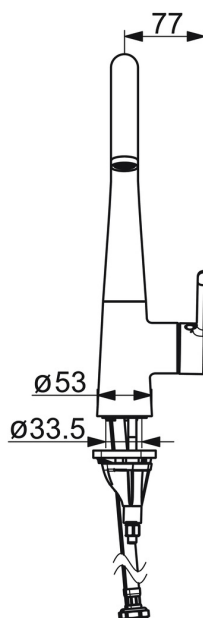

Technical data

Flow properties

Flow-rate at 3 bar	12.0 l/min
Pressure loss with flow (0.2 l/s)	3 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	219 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

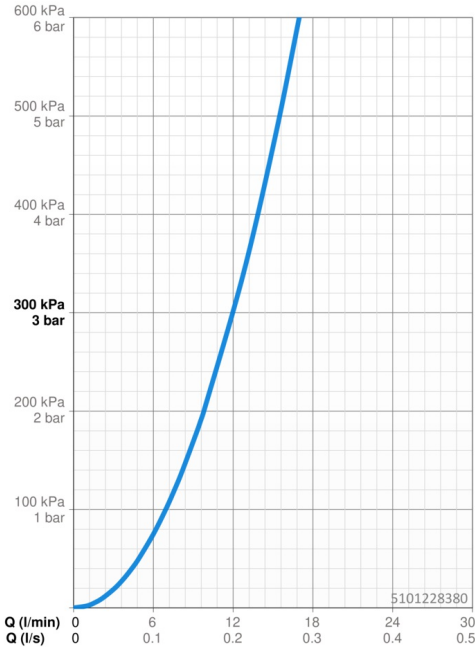

Spare parts

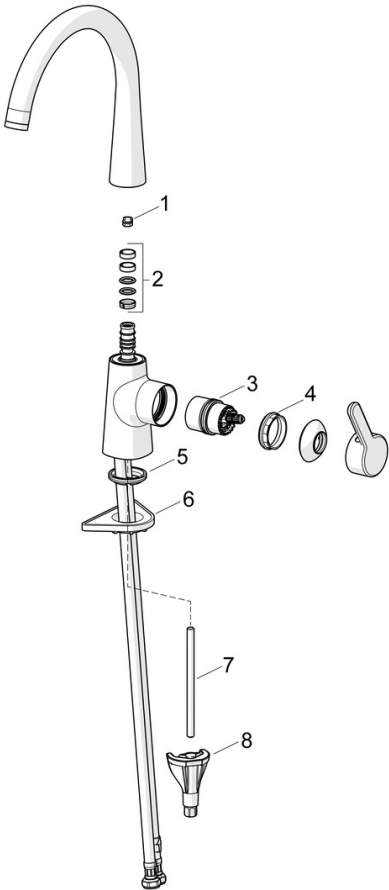

SP51012283CLR




	Name	Code
01	Spout overturning stopper, 60°/0°	59914264
01	Spout overturning stopper, 120° Discontinued	59914429
02	Sealing kit for spout	59914431
03	Cartridge	59914665
04	Tightening nut, M42x1.5, SW 38	59914128
05	Bottom seal	59914591
06	Supporting plate	59910008
07	Fixing screw, M8x1, L=130	59914474
08	Fixing set	59914475

EAN: 4057304020230
static.hansa.com/5101228381

single-lever kitchen mixer, DN 15



- Kitchen
- Single-lever, side operated
- Deck mounted
- Brushed bronze
- Swivel spout, Swivel range limiting option
- Standard aerator
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

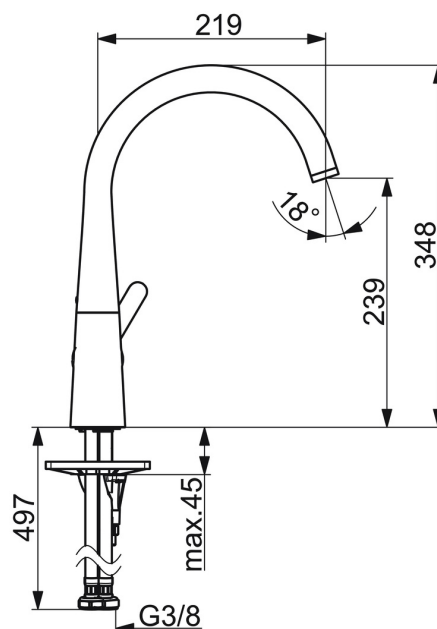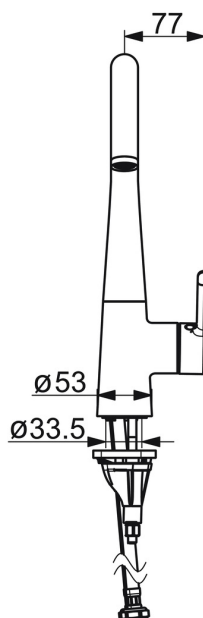

Technical data

Flow properties

Flow-rate at 3 bar	12.0 l/min
Pressure loss with flow (0.2 l/s)	3 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	219 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

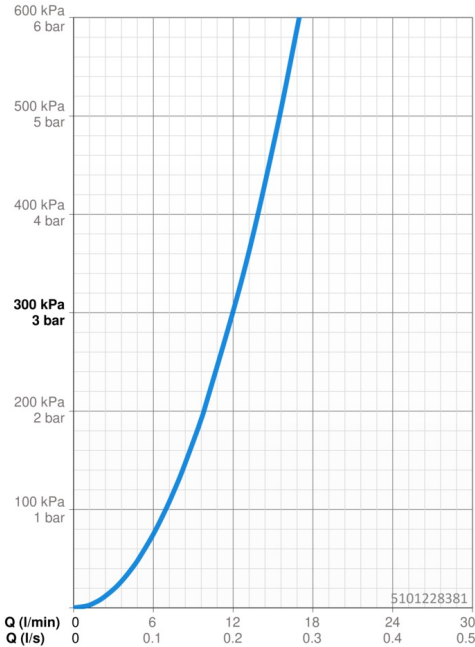

Spare parts

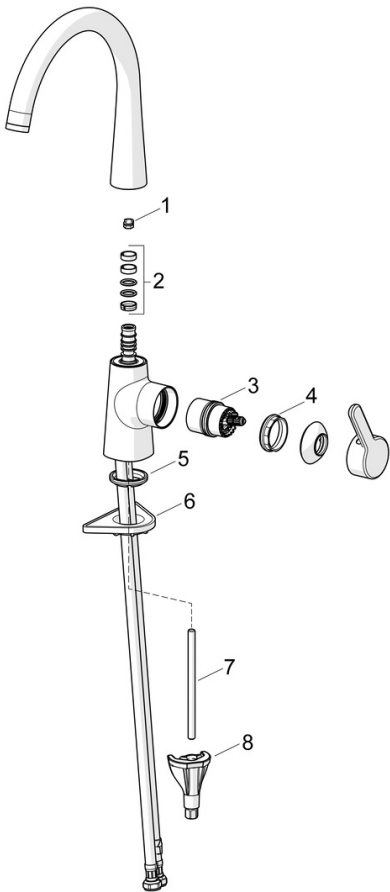

SP51012283CLR



	Name	Code
01	Spout overturning stopper, 60°/0°	59914264
01	Spout overturning stopper, 120° Discontinued	59914429
02	Sealing kit for spout	59914431
03	Cartridge	59914665
04	Tightening nut, M42x1.5, SW 38	59914128
05	Bottom seal	59914591
06	Supporting plate	59910008
07	Fixing screw, M8x1, L=130	59914474
08	Fixing set	59914475

EAN: 4057304020186
static.hansa.com/5136228333



single-lever kitchen mixer, DN 15

- Kitchen
- Single-lever, side operated
- Deck mounted
- Matt black
- Swivel spout, Pull-out model, Swivel range limiting option
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Soft- and Needle-Spray
- 2 spray functions

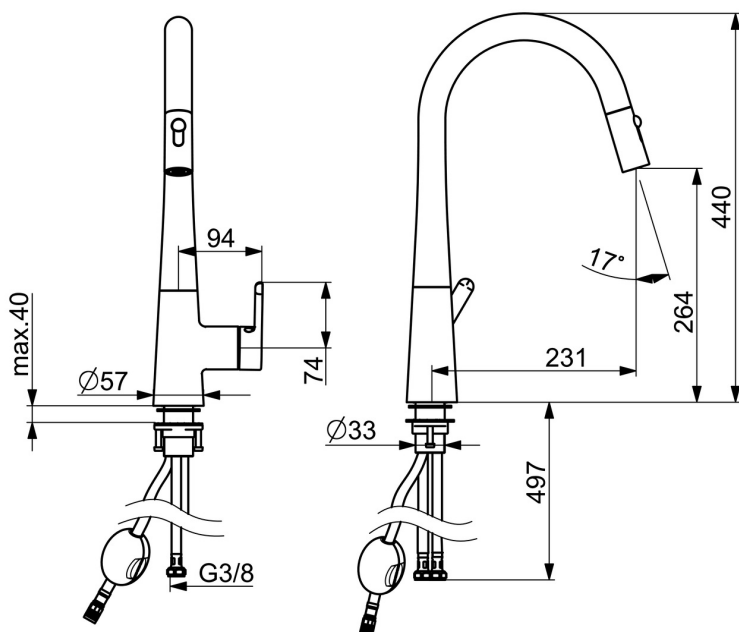

Technical data

Flow properties

Flow-rate at 3 bar	9.6 l/min
Pressure loss with flow (0.2 l/s)	3 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70° C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	231 mm
Backflow prevention (EN1717)	EB
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

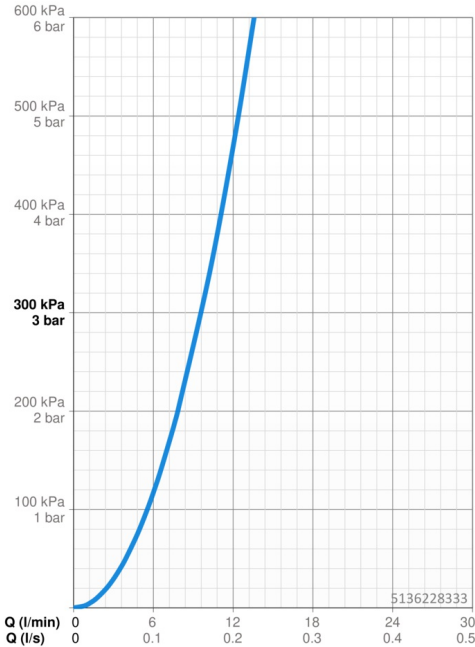

Spare parts

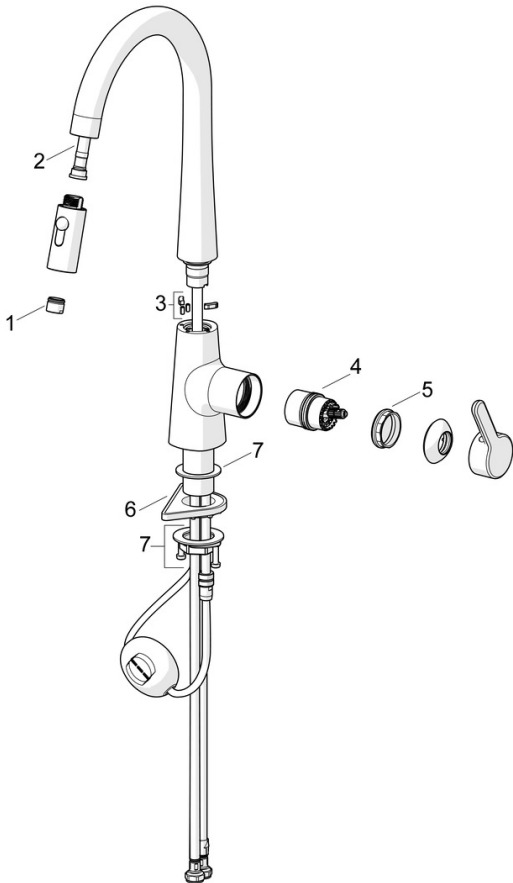

SP51362283CLR



	Name	Code
01	Aerator	59914583
02	Hose, L=1500, G1/2-M14x1	59914690
03	Spout overturning stopper, 60° /0° Discontinued	59914281
04	Cartridge	59914665
05	Tightening nut, M42x1.5, SW 38	59914128
06	Supporting plate	59910008
07	Fixing set	59913371

EAN: 4057304020193
static.hansa.com/5136228380



single-lever kitchen mixer, DN 15

- Kitchen
- Single-lever, side operated
- Deck mounted
- Brushed steel
- Swivel spout, Pull-out model, Swivel range limiting option
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Soft- and Needle-Spray
- 2 spray functions

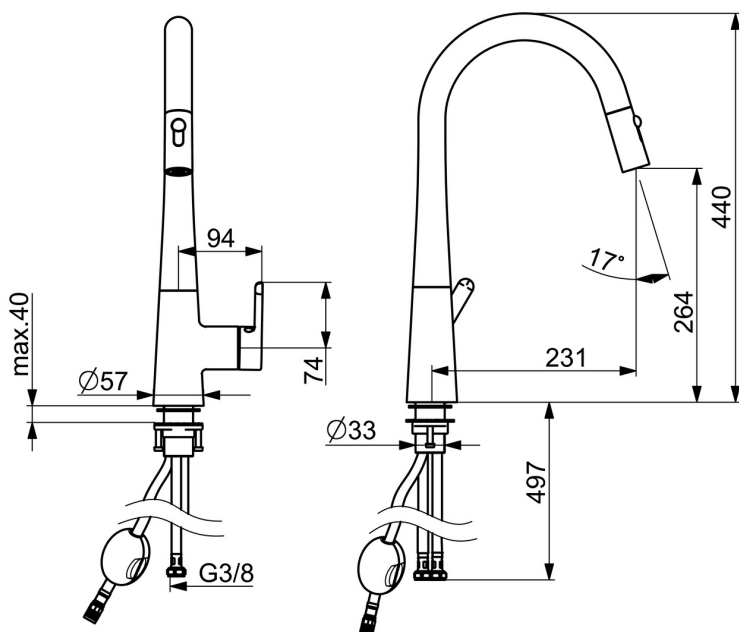

Technical data

Flow properties

Flow-rate at 3 bar	9.6 l/min
Pressure loss with flow (0.2 l/s)	4.7 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	231 mm
Backflow prevention (EN1717)	EB
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

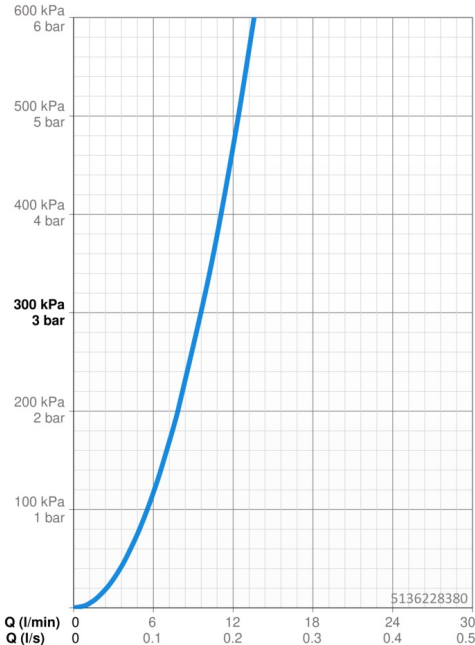

Spare parts

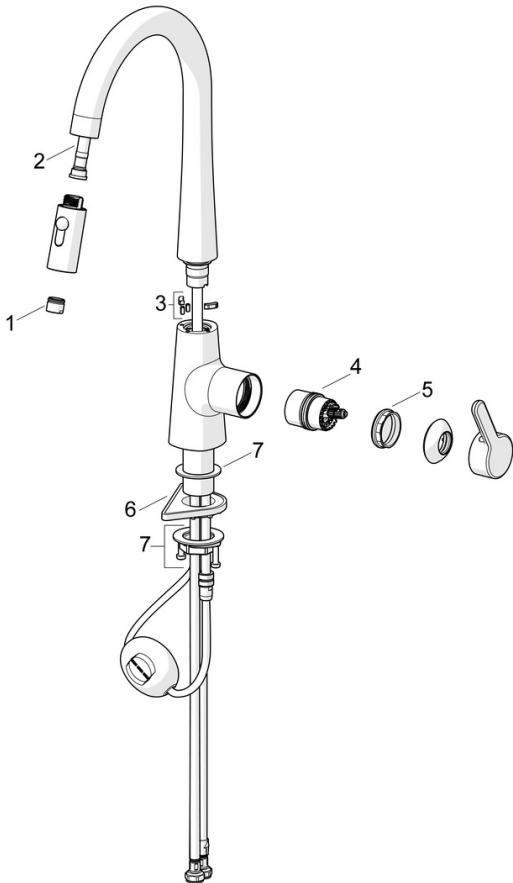

SP51362283CLR



	Name	Code
01	Aerator	59914583
02	Hose, L=1500, G1/2-M14x1	59914690
03	Spout overturning stopper, 60° /0° Discontinued	59914281
04	Cartridge	59914665
05	Tightening nut, M42x1.5, SW 38	59914128
06	Supporting plate	59910008
07	Fixing set	59913371

EAN: 4057304020209
static.hansa.com/5136228381



single-lever kitchen mixer, DN 15

- Kitchen
- Single-lever, side operated
- Deck mounted
- Brushed bronze
- Swivel spout, Pull-out model, Swivel range limiting option
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- $\varnothing$ 40 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Soft- and Needle-Spray
- 2 spray functions

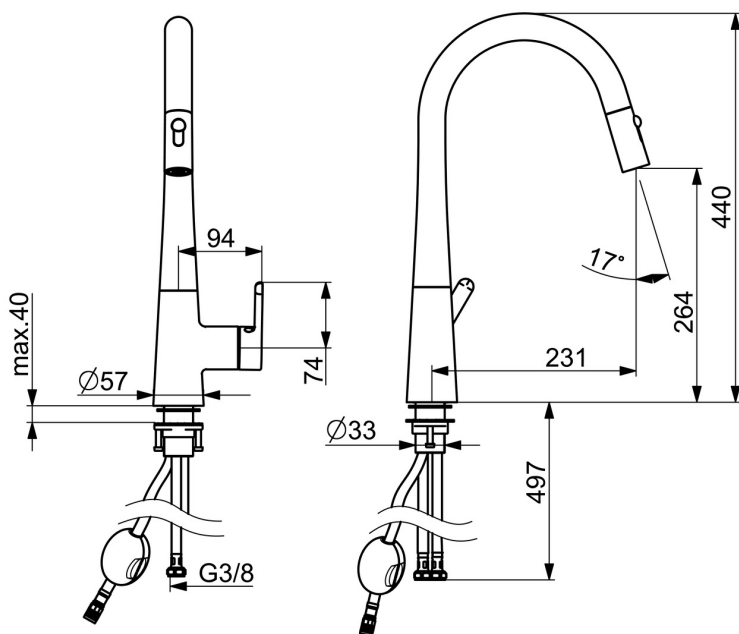

Technical data

Flow properties

Flow-rate at 3 bar	9.6 l/min
Pressure loss with flow (0.2 l/s)	3 bar

Technical properties


DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	231 mm
Backflow prevention (EN1717)	EB
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations

Declaration of conformity	DoC
---------------------------	-----

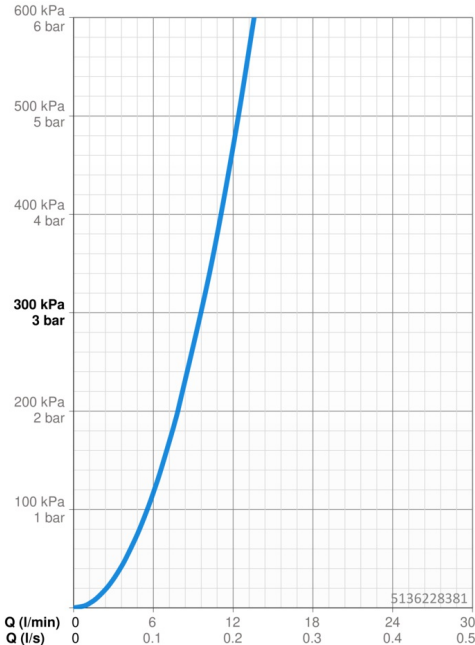

Spare parts

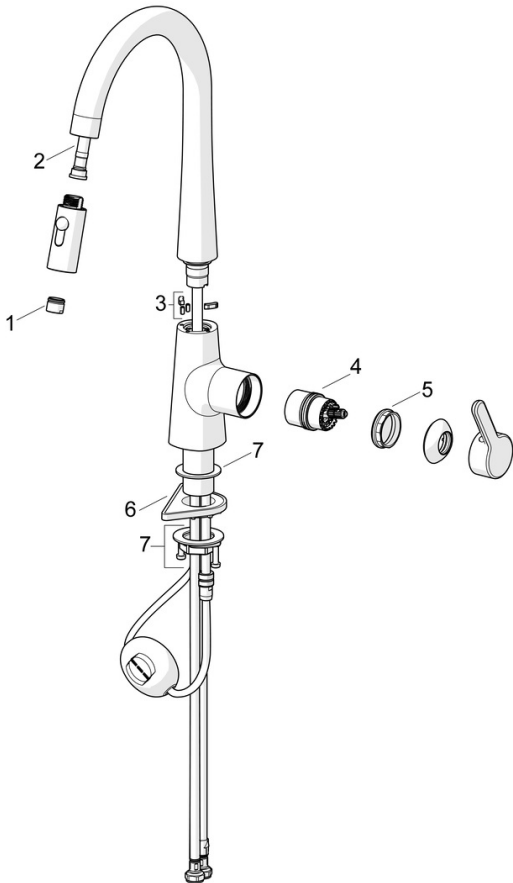

SP51362283CLR

	Name	Code
01	Aerator	59914583
02	Hose, L=1500, G1/2-M14x1	59914690
03	Spout overturning stopper, 60° /0° Discontinued	59914281
04	Cartridge	59914665
05	Tightening nut, M42x1.5, SW 38	59914128
06	Supporting plate	59910008
07	Fixing set	59913371