

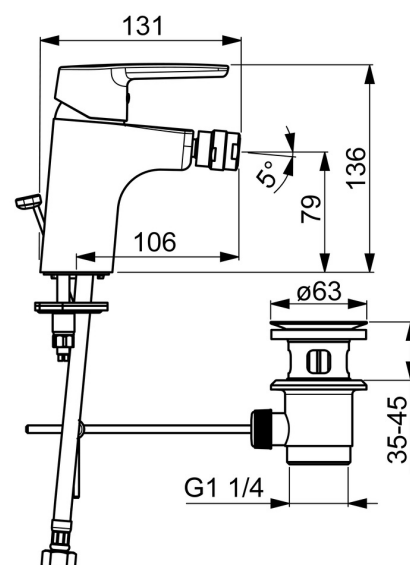


EAN: 4057304004018  
[static.hansa.com/51433293](https://static.hansa.com/51433293)

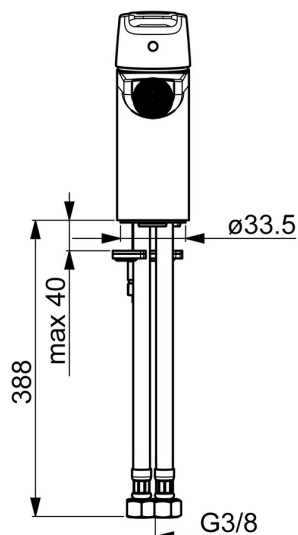

- Bidet
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations, Ball joint
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- Ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, Rapid installation system

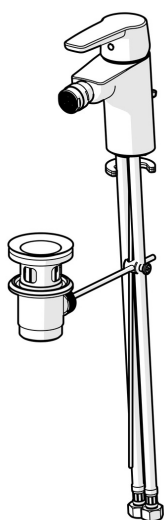

## Technical data

### Flow properties

Flow-rate at 3 bar (with flow controller)

6.0 l/min

### Technical properties

DN-size (nominal dimension)

max. +70°C

Working pressure

0.5-10 bar

Connection size

106 mm

Projection

Brass

### Regulations

EN standard

I (ISO3822)


### Approvals and Declarations

KIWA


DVGW

K6116/08

NW-6506BP0361

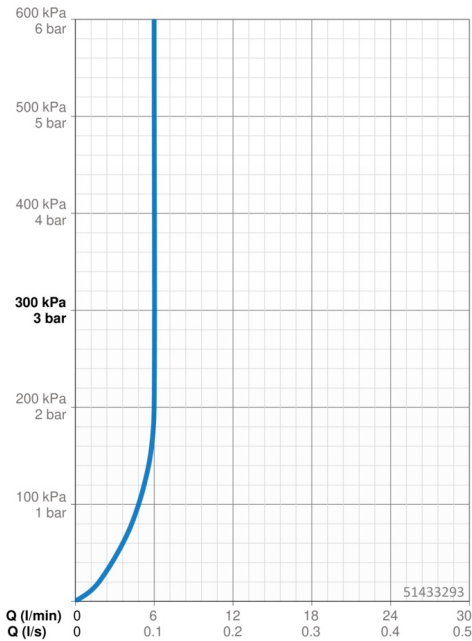

## Spare parts

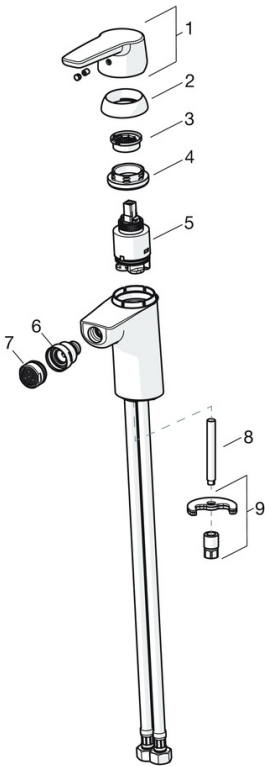

### SP51433293

	Name	Code
01	Lever	59914417
02	Covering cap, 33x3 mm	59912504
03	Temperature adjustment limiter	59912325
04	Tightening nut, M40x1	1003409V
05	Cartridge, 3.5 Classic	59913075
06	Ball joint for bidet faucet	59910952
07	Aerator, M24x1, 6 l/min	59913727
08	Fixing screw, M8x1, L=140	59912474
09	Fixing set	59910749
N.I.	Pop-up waste, (2019-)	59914764