

EAN: 4057304019951
static.hansa.com/523722670005



The HANSAVANTIS is the perfect fit for any bathroom, with a proven expert quality you can rely on, no matter your specific needs. Durable and long-lasting in both design and service life, this faucet brings you joy and confidence for years to come. Functional considerations and a dedicated level of detail offer a new user experience.

Easy to install with the 3S installation system.


High quality

Sleek design

Made in Europe

Washbasin faucet with maximum comfort

- ECO Building
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- ø 30 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting

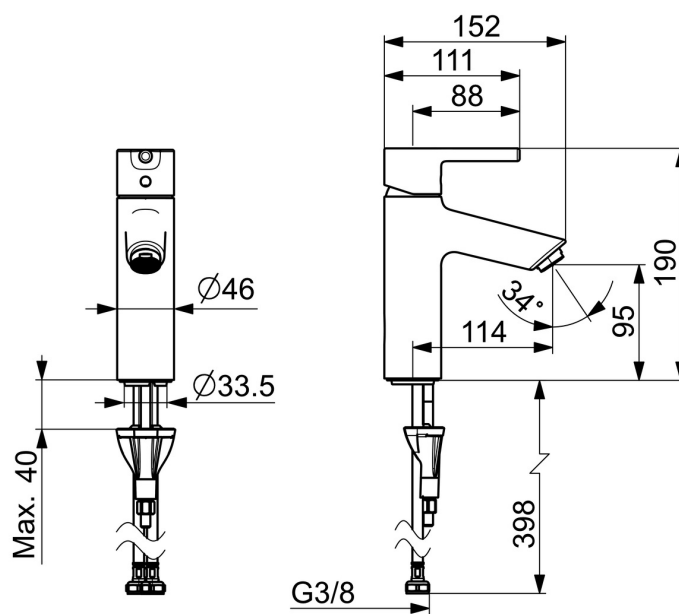

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	4.2 l/min
---	-----------

Technical properties

Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	114 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations


Declaration of conformity	DoC
EPD	S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.)	6,77
EPD module A2 (kg CO2 eq.)	0,32
EPD module A3 (kg CO2 eq.)	0,64
EPD module A1-A3 (kg CO2 eq.)	7,74
EPD module A4 (kg CO2 eq.)	0,21
EPD module B7 (kg CO2 eq.)	1297,80
EPD module C2 (kg CO2 eq.)	0,01
EPD module C3 (kg CO2 eq.)	0,02
EPD module C4 (kg CO2 eq.)	0,06
EPD module D (kg CO2 eq.)	-5,50

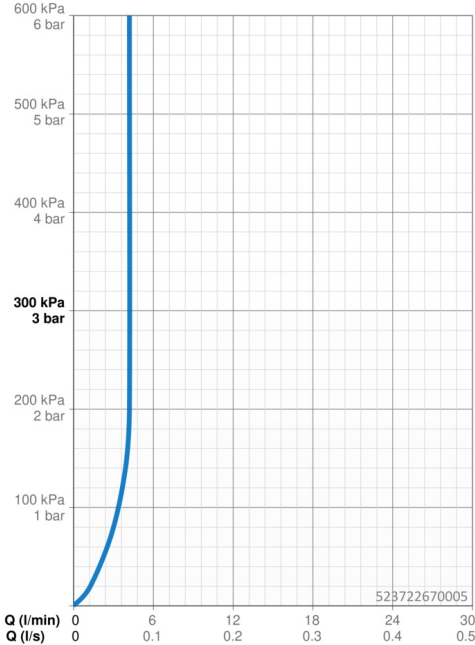

Spare parts

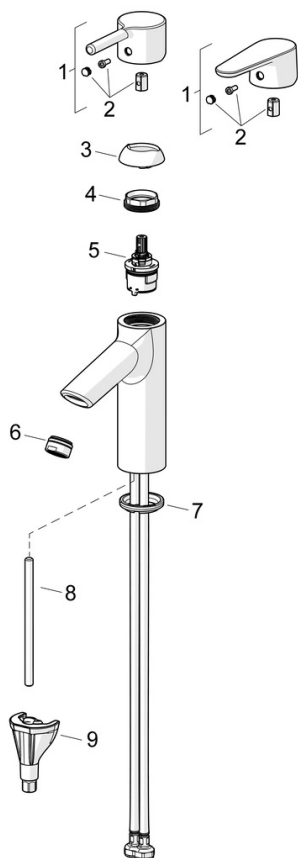

SP52422263-GB

	Name	Code
01	Lever	1014995V
01	Lever	1015000V
02	Symbol plug	1012105V
03	Covering cap	1012421V
04	Tightening nut, M34x1.5	1012133V
05	Cartridge, 3.0	1014428V
06	Aerator, M24x1, -105	59914550
07	Bottom seal	59914591
08	Fixing screw, M8x1, L=130	59914474
09	Fixing set	59914475

EAN: 4057304019968
static.hansa.com/524222630005



The HANSAVANTIS is the perfect fit for any bathroom, with a proven expert quality you can rely on, no matter your specific needs. Durable and long-lasting in both design and service life, this faucet brings you joy and confidence for years to come. Functional considerations and a dedicated level of detail offer a new user experience.

Easy to install with the 3S installation system.



High quality

Sleek design

Made in Europe

Washbasin faucet with maximum comfort

- ECO Building
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Single operating lever/handle, Hot/Cold symbols
- Limitation option for maximum temperature and flow-rate
- Ø 30 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting
- Without pop-up waste

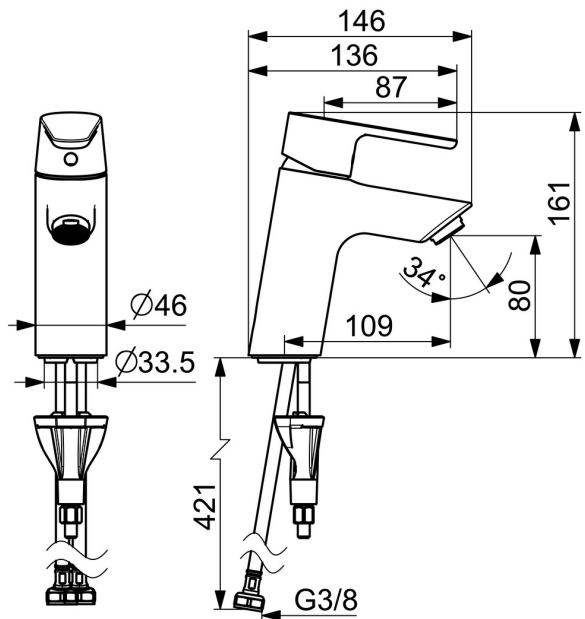

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)	4.2 l/min
---	-----------

Technical properties

Hot water supply	max. +70°C
Working pressure	0.5-10 bar
Connection size	G3/8
Projection	109 mm
Backflow prevention (EN1717)	AA
Material	Brass

Regulations


EN standard	EN 817
Noise class	I (ISO 3822)

Approvals and Declarations


Declaration of conformity	DoC
EPD	S-P-06391

Sustainability

EPD module A1 (kg CO2 eq.)	6,23
EPD module A2 (kg CO2 eq.)	0,30
EPD module A3 (kg CO2 eq.)	0,59
EPD module A1-A3 (kg CO2 eq.)	7,12
EPD module A4 (kg CO2 eq.)	0,20
EPD module B7 (kg CO2 eq.)	1297,80
EPD module C2 (kg CO2 eq.)	0,01
EPD module C3 (kg CO2 eq.)	0,01
EPD module C4 (kg CO2 eq.)	0,05
EPD module D (kg CO2 eq.)	-5,06

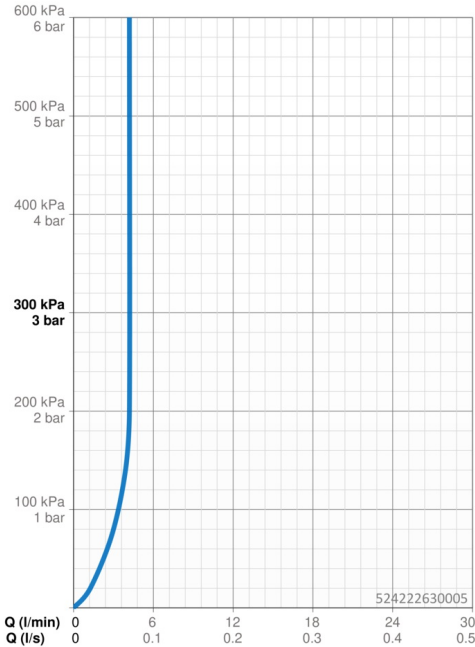

Spare parts

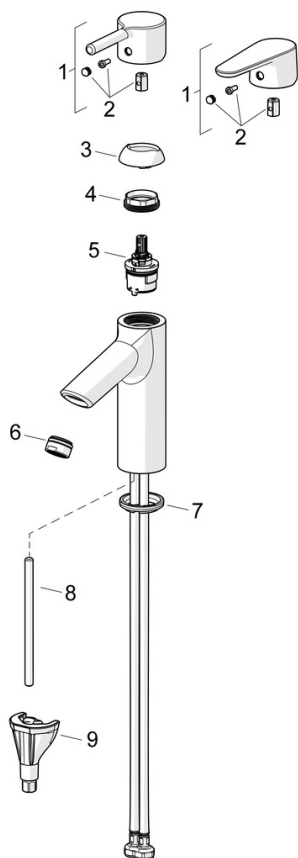

SP52422263-GB

	Name	Code
01	Lever	1014995V
01	Lever	1015000V
02	Symbol plug	1012105V
03	Covering cap	1012421V
04	Tightening nut, M34x1.5	1012133V
05	Cartridge, 3.0	1014428V
06	Aerator, M24x1, -105	59914550
07	Bottom seal	59914591
08	Fixing screw, M8x1, L=130	59914474
09	Fixing set	59914475