



EAN: 4015474253872  
[static.hansa.com/52450177](https://static.hansa.com/52450177)

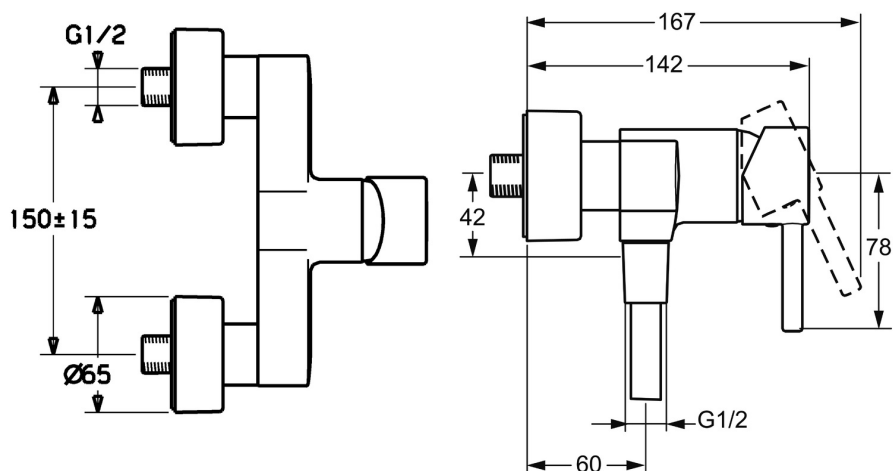

- Shower solutions
- Single-lever
- Wall mounted
- Chrome
- Hot/Cold symbols, Pin shape, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- Non-return valve(s), ø 35 mm ceramic cartridge for flow and temperature control
- Eccentric coupling(s), Cover plate(s), Silencer(s)
- Inner body made of DZR brass
- protected against back-flow in domestic use (according to DIN EN 1717)

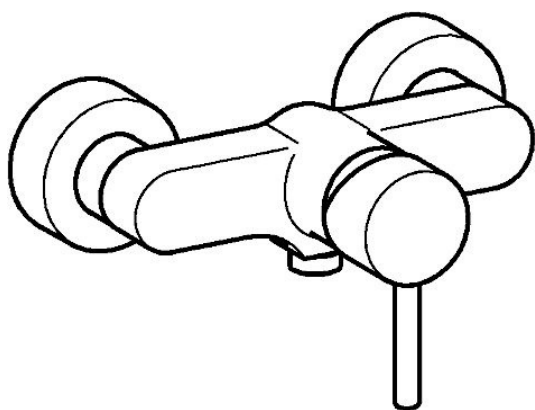

## Technical data

### Flow properties

|                                   |                   |
|-----------------------------------|-------------------|
| Flow-rate at 3 bar                | <b>16.8 l/min</b> |
| Pressure loss with flow (0.2 l/s) | <b>1.6 bar</b>    |

### Technical properties


|                              |                      |
|------------------------------|----------------------|
| DN-size (nominal dimension)  | <b>DN15</b>          |
| Hot water supply             | <b>max. +90°C</b>    |
| Working pressure             | <b>0.5-10 bar</b>    |
| Connection size              | <b>G3/4</b>          |
| Installation width           | <b>CC150 ± 15 mm</b> |
| Backflow prevention (EN1717) | <b>EB</b>            |
| Material                     | <b>Brass</b>         |

### Regulations


|             |                     |
|-------------|---------------------|
| EN standard | <b>EN 817</b>       |
| Noise class | <b>I (ISO 3822)</b> |

### Approvals and Declarations

|      |                       |
|------|-----------------------|
| KIWA | <b>K6116/08</b>       |
| ABP  | <b>PA-IX 38249/IB</b> |

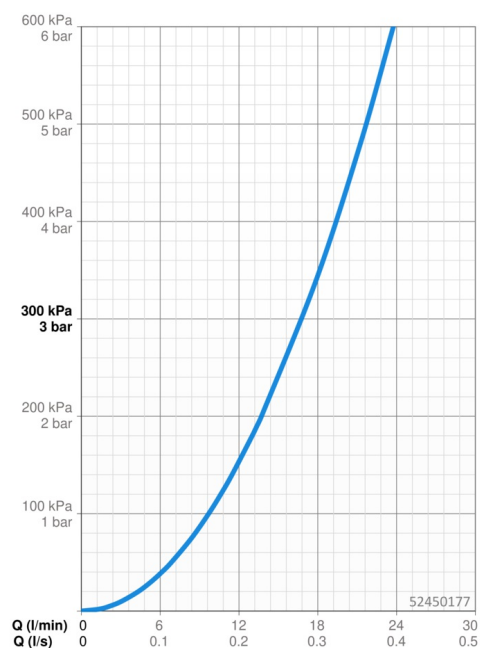

Spare parts

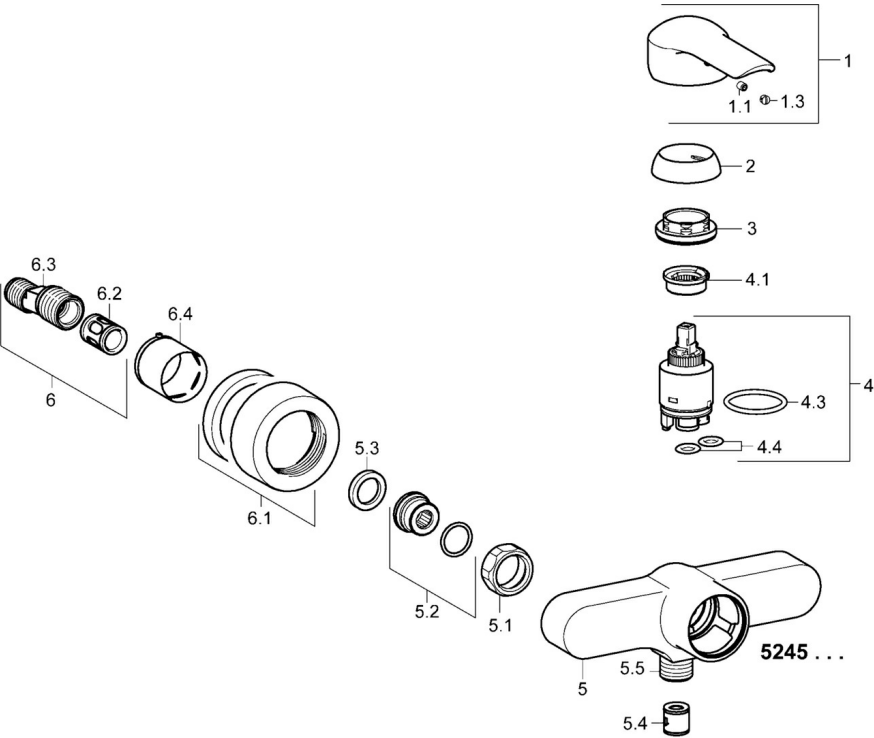

SP52450173

|      | Name                                 | Code     |
|------|--------------------------------------|----------|
| 1    | Lever                                | 59913840 |
| 1    | Lever                                | 59914629 |
| 1.1  | Screw, M5x8, SW2.5                   | 59904755 |
| 1.3  | Symbol plug Grey                     | 59912112 |
| 2    | Covering cap, 33x3 mm                | 59912504 |
| 3    | Tightening nut, M40x1                | 1003409V |
| 4    | Cartridge, 3.5 Eco                   | 59912324 |
| 4    | Cartridge, 3.5 Classic               | 59913075 |
| 4.1  | Temperature adjustment limiter       | 59912325 |
| 4.3  | O-ring, d 28.24x2.62 Discontinued    | 59912590 |
| 4.4  | O-ring, d 10.10x1.60 Discontinued    | 59905072 |
| 5.1  | Connection nut, G3/4, AF30           | 59902230 |
| 5.2  | Connector                            | 59913400 |
| 5.3  | Retaining ring, 23.9x15.2x2          | 59902689 |
| 5.4  | Non-return valve                     | 59905714 |
| 5.5  | Thread nipple, G1/2xM18x1            | 59911384 |
| 6    | Eccentric, G3/4xG1/2                 | 59904793 |
| 6.1  | Cover flange                         | 59913432 |
| 6.2  | Silencer                             | 59904792 |
| 6.3  | Eccentric connector, G3/4xG1/2, DN15 | 59910254 |
| 6.4  | Cover sleeve                         | 59912651 |
| N.I. | Key, SW30/34                         | 59912108 |