



EAN: 4057304020261
static.hansa.com/5444220733

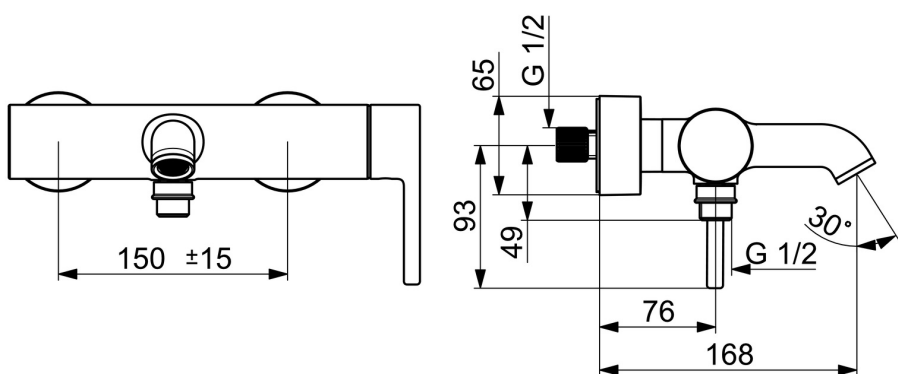

- Bathtub & Shower
- Single-lever, side operated
- Wall mounted
- Matt black
- Fixed spout
- Standard aerator
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Pull operated diverter, Automatic reset
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ϕ 40 mm ceramic cartridge for flow and temperature control
- Eccentric coupling(s), Cover plate(s)
- Inner body made of DZR brass
- protected against back-flow in domestic use (according to DIN EN 1717)



Technical data

Flow properties

Flow-rate at 3 bar

21.0 / 15.0 l/min

Technical properties

Hot water supply

max. +80°C

Working pressure

0.5-10 bar

Connection size

G3/4

Installation width

CC150± 15 mm

Projection

168 mm

Backflow prevention (EN1717)

EB

Material

Brass

Regulations

EN standard

EN 817

Noise class

II (ISO 3822)

Approvals and Declarations

Declaration of conformity

DoC

EPD

S-P-06397

Sustainability

EPD module A1 (kg CO2 eq.)

13,06

EPD module A2 (kg CO2 eq.)

0,61

EPD module A3 (kg CO2 eq.)

1,50

EPD module A1-A3 (kg CO2 eq.)

15,16

EPD module A4 (kg CO2 eq.)

0,54

EPD module B7 (kg CO2 eq.)

2637,50

EPD module C2 (kg CO2 eq.)

0,03

EPD module C3 (kg CO2 eq.)


0,03

EPD module C4 (kg CO2 eq.)

1,08

EPD module D (kg CO2 eq.)

-9,62

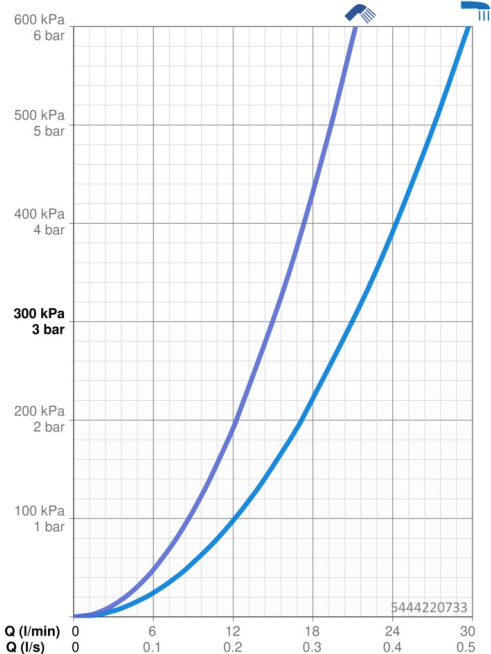

Spare parts

SP5444220733

Name

Code