



EAN: 4057304019005
static.hansa.com/55502203

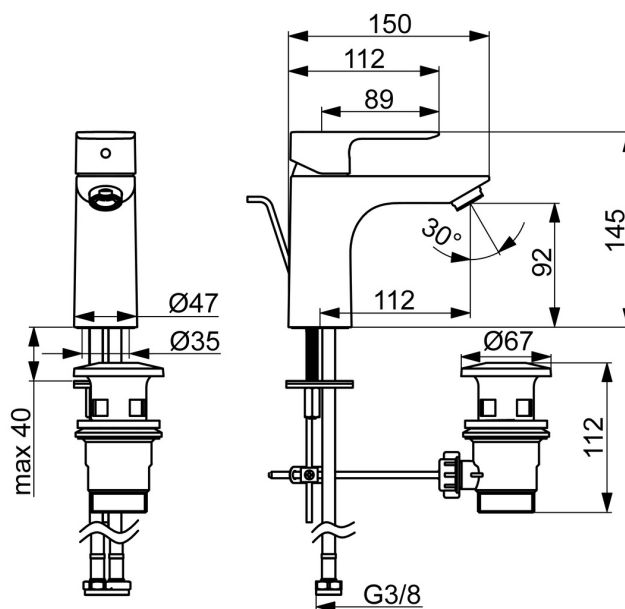

- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Pop-up waste with draw-rod
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system

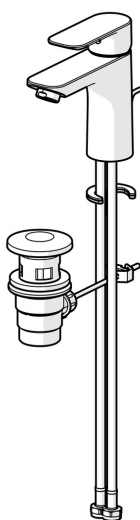

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.8 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

112 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817

Noise class

I (ISO 3822)

Approvals and Declarations

DVGW


DW-6506D00165

ABP


PA-IX 10072/IO

Declaration of conformity

DoC

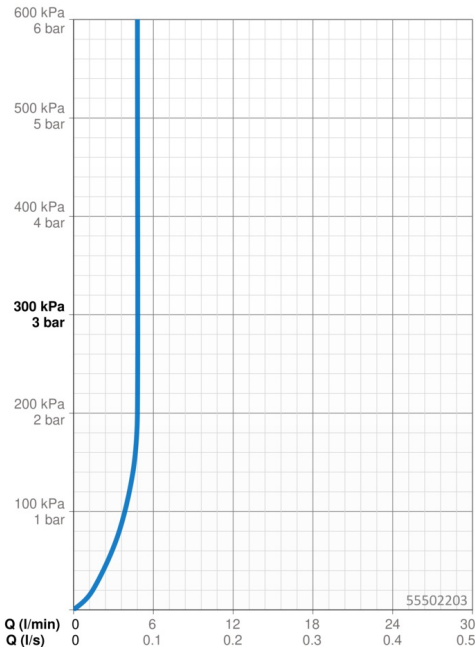

Spare parts

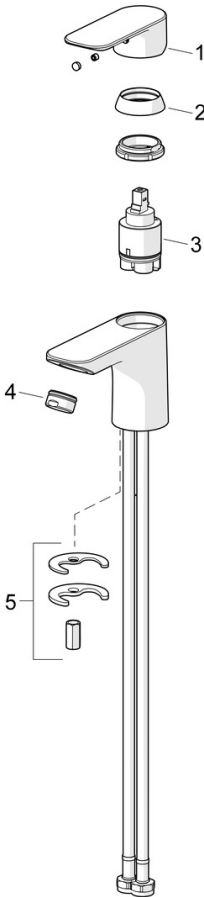

SP55402203

	Name	Code
01	Lever	1017126V
02	Covering cap	1017127V
03	Cartridge, 3.5 Classic	59913075
04	Aerator, M24x1, 6 l/min	59913727
05	Fixing set	1017128V