



EAN: 4057304019012
static.hansa.com/55542203

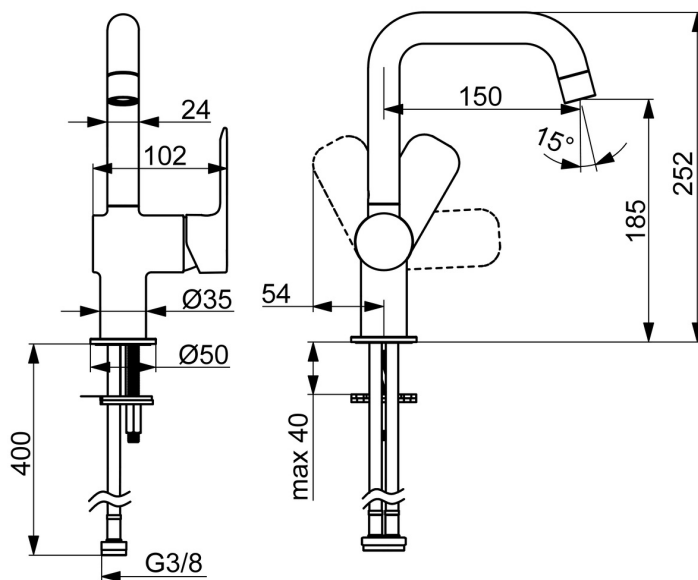

- Washbasin
- Single-lever, side operated
- Deck mounted
- Chrome
- Swivel spout
- PCA® - constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Rapid installation system
- Without pop-up waste, Without draw-rod opening

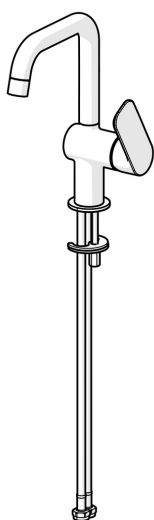

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.8 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

150 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817

Noise class

I (ISO 3822)

Approvals and Declarations

DVGW


DW-6506D00165

ABP


PA-IX 10073/IO

Declaration of conformity

DoC

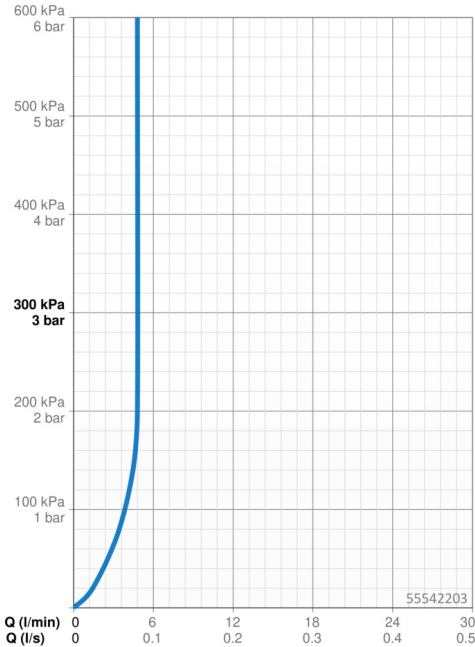

Spare parts

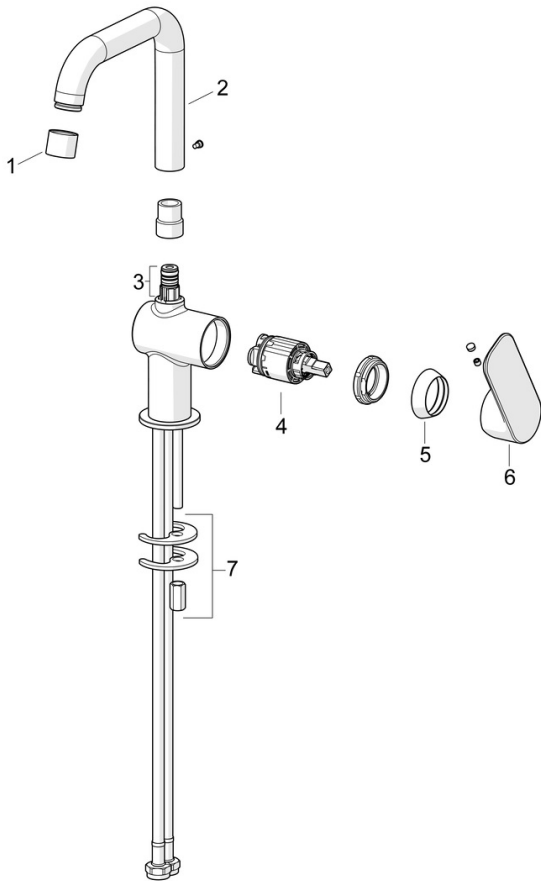

SP55552203

	Name	Code
01	Aerator	1017130V
02	Spout	1017129V
03	Sealing kit	1017131V
04	Cartridge, 3.5 Classic	59913075
05	Covering cap	1017127V
06	Lever	1017126V
07	Fixing set	1017128V