


EAN: 4057304012341  
[static.hansa.com/56502203](https://static.hansa.com/56502203)



- Kitchen
- Single-lever
- Deck mounted
- Chrome
- Swivel spout, Swivel range limiting option
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting

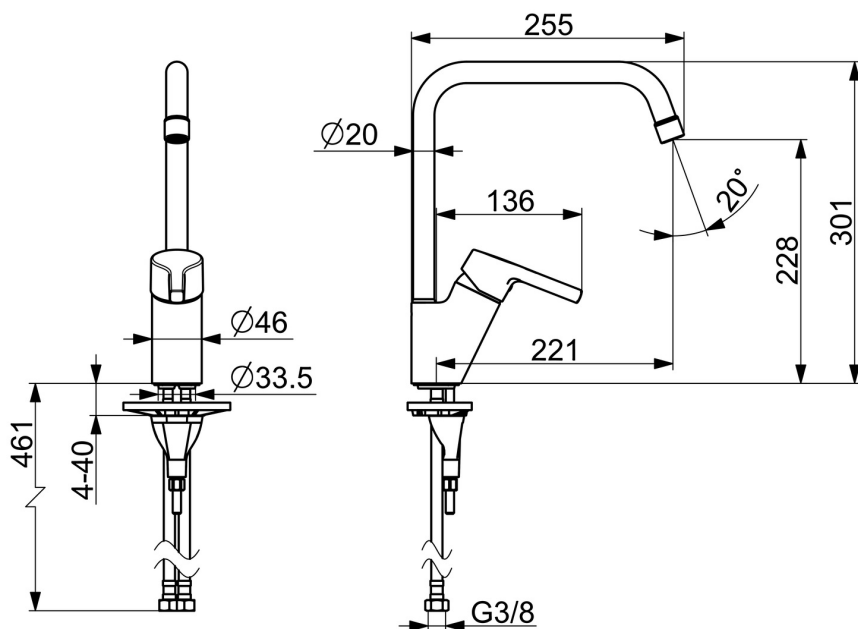

Technical data

Flow properties

Flow-rate at 3 bar

12.0 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +80°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

221 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817

Noise class

I(ISO3822)

Approvals and Declarations

EPD

S-P-06396

Sustainability

EPD module A1 (kg CO2 eq.)

6,56

EPD module A2 (kg CO2 eq.)

0,31

EPD module A3 (kg CO2 eq.)

2,88

EPD module A1-A3 (kg CO2 eq.)

9,75

EPD module A4 (kg CO2 eq.)

0,19

EPD module B7 (kg CO2 eq.)

4728,00

EPD module C2 (kg CO2 eq.)

0,01

EPD module C3 (kg CO2 eq.)


0,02

EPD module C4 (kg CO2 eq.)

0,30

EPD module D (kg CO2 eq.)

-5,51

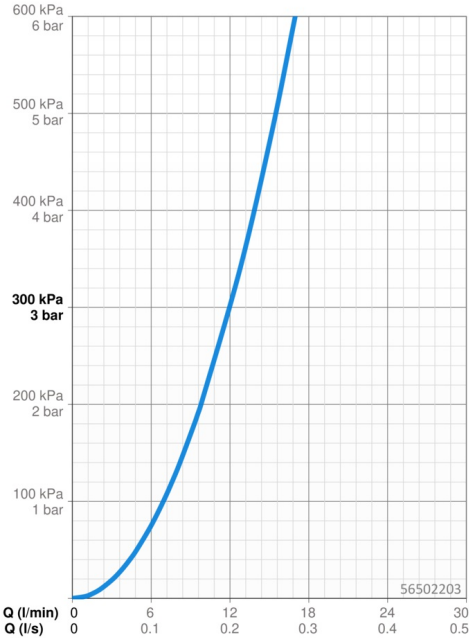



© 2024 Hansa Armaturen GmbH - [www.hansa.com](http://www.hansa.com) - 16.04.2024