



EAN: 4015474262423
static.hansa.com/581491030056

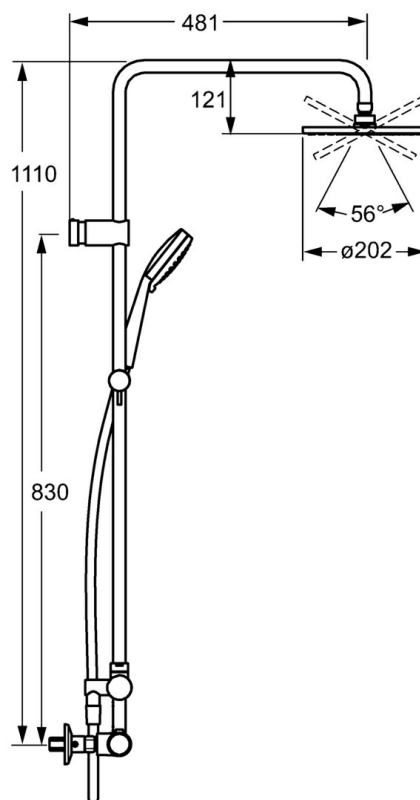

- Shower solutions
- Thermostatic
- Wall mounted
- Chrome
- Temperature control handle, Flow control handle
- Integrated into flow control handle
- Adjustable shower rail bracket, Shower hose (1250 mm)
- Adjustable hot water stop (included, retrofittable), Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Litter filter(s), Ceramic head part for flow control, Non-return valve(s)
- Inner body made of DZR brass
- protected against back-flow in domestic use (according to DIN EN 1717)
- 3 spray functions

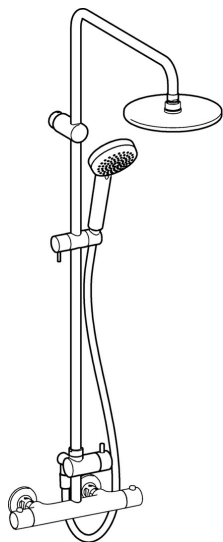

Technical data

Flow properties

Flow-rate at 3 bar

12.0 / 12.0 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +80°C

Working pressure

1-10 bar

Installation width

cc153 mm

Backflow prevention (EN1717)

EB

Regulations

EN standard

EN 1111

