


- Spare parts
- Autofocus infrared sensor, Low battery indicator

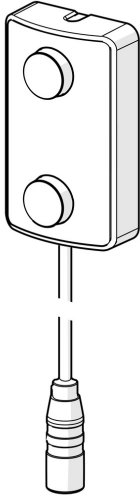

Technical data

Software settings

Automatic flush	off (off/12/24/48/72 h)
Automatic flush period	30 s (10/30/60/120/180/240/300/600)
Max. flow period	6 s (4/6/8/10/20/60 s)
Opening range	0-5 cm

Regulations

EU Directives	C € EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU
EN standard	ETSI EN 301 489-1 V1.9.2, ETSI EN 300 328 v2.2.2, EN 61000-6-1:2007, EN 61000-6-3:2007+A1:2011+AC:2012, EN 60335-1:2012+A11+A13+A14+A2+A15:2021, Part 19.11.4
Protection class	IP 67

Approvals and Declarations

Declaration of conformity	EMC
---------------------------	------------