



EAN: 4015474277182
static.hansa.com/64462201



- Public & Semi-public, Health & Care
- Battery-operated, Touchless
- Wall mounted
- Chrome
- Swivel spout, Profile construction
- Standard aerator
- Temperature control handle
- Limitation option for maximum temperature and flow-rate
- Litter filter(s), Non-return valve(s), Pressostatic cartridge for automatic temperature control
- Autofocus infrared sensor, Solenoid valve, Low battery indicator
- Eccentric coupling(s), with integrated shut-off valve(s)
- Software settings adjustable via magnetic key



Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

6.0 l/min

Technical properties

DN-size (nominal dimension)

DN15

Hot water supply

max. +70°C

Working pressure

1-10 bar

Installation width

cc150 ± 15 mm

Projection

150 mm

Backflow prevention (EN1717)

AA

Material

Brass

Software settings

Afterflow period

2 s ± 1 s

Automatic flush

off (off/24/48/72 h)

Automatic flush period

30 s

Max. flow period

2 min

Opening range

0-5 cm

Electronic properties

Battery

Lithium 2CR5 6 V

Regulations

EU Directives

C € EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU

EN standard

EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4



Protection class

IP 55


Approvals and Declarations

UN38.3

UN38-3 Maxell 2CR5

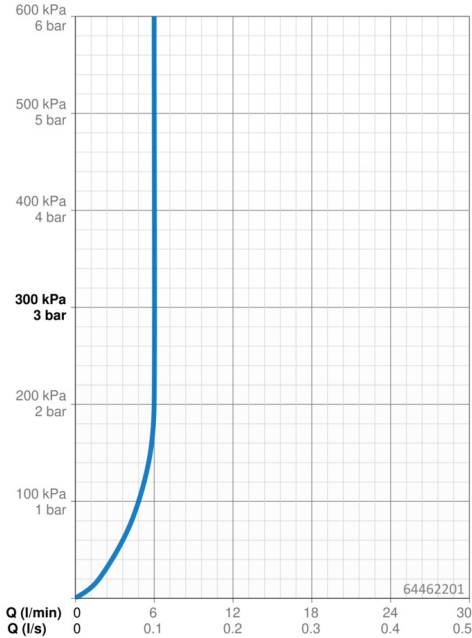

Spare parts

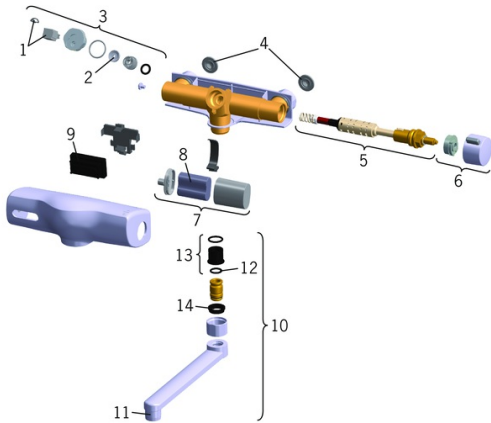

SP64452201

	Name	Code
1	Pilot valve	59914149
2	Membrane	59914150
3	Solenoid valve	59914151
4	Filter sealing, G3/4	59911076
5	Pressostatic cartridge	59914152
6	Temperature control handle	59914153
7	Battery casing	59914154
8	Battery, 2CR5 6 V	59911670
9	Sensor, 6 V	59914155
10	Spout, L=100	59914230
10	Spout, L=200	59914156
11	Aerator, M22x1	59914157
12	O-ring, 13.6x2.4	59914158
13	Bushing (10 pcs), 18/20.6	59914159
14	Retaining ring Discontinued	59914160
N.I.	Magnetic key	59914378