

EAN: 4057304017254
static.hansa.com/52432267



The HANSAVANTIS is the perfect fit for any bathroom, with a proven expert quality you can rely on, no matter your specific needs. Durable and long-lasting in both design and service life, this faucet brings you joy and confidence for years to come. Functional considerations and a dedicated level of detail offer a new user experience.

Easy to install with the 3S installation system.




High quality

Sleek design

Made in Europe

Bidet faucet with maximum comfort

- Bidet
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator, PCA® - constant flow rate regardless of pressure variations, Ball joint
- Single operating lever/handle, Pin shape, Hot/Cold symbols
- Pop-up waste with draw-rod
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- Ø 30 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass, 3S-installation system for safe and simple mounting

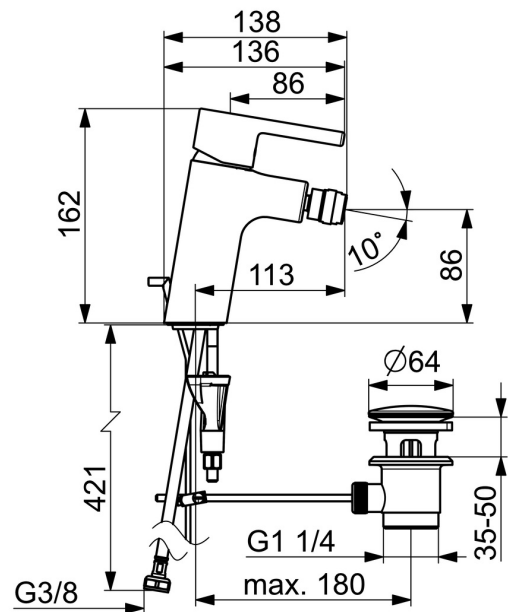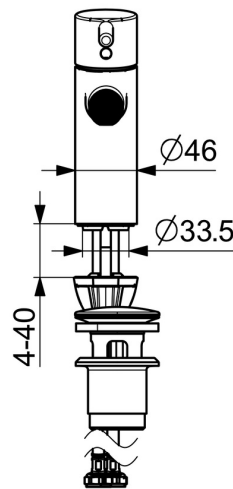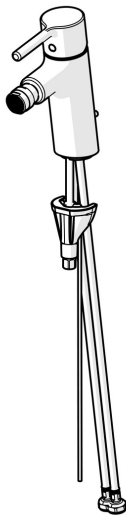

Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

6.0 l/min

Technical properties

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

113 mm

Backflow prevention (EN1717)

AA

Material

Brass


Regulations

EN standard


EN 817

Noise class

I (ISO 3822)

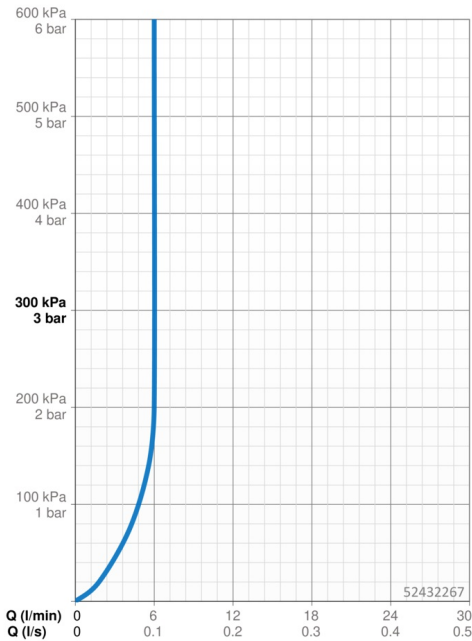

Spare parts

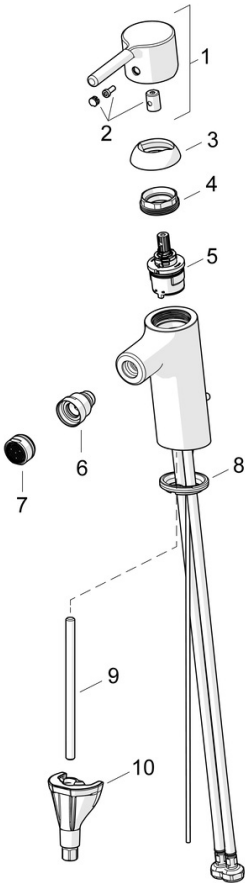

SP52432267

	Name	Code
01	Lever	1015000V
02	Symbol plug	1012105V
03	Covering cap	1012421V
04	Tightening nut, M34x1.5	1012133V
05	Cartridge, 3.0	1014428V
06	Ball joint for bidet faucet	59910952
07	Aerator, M24x1, 6 l/min	59913727
08	Bottom seal	59914591
09	Fixing screw, M8x1, L=130	59914474
10	Fixing set	59914475