

EAN: 4057304012068  
[static.hansa.com/563622030037](http://static.hansa.com/563622030037)



- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- Standard aerator
- Hot/Cold symbols, Single operating lever/handle
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- $\varnothing$  35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- 3S-installation system for safe and simple mounting
- WithoutPopUpWaste

## Technical data

### Flow properties


Flow-rate at 3 bar (with flow controller) **6.0 l/min**


### Technical properties

DN-size (nominal dimension) **DN15**  
 Hot water supply **max. +80°C**  
 Working pressure **0.5-10 bar**  
 Connection size **G1/2**  
 Projection **102 mm**  
 Material **Brass**


### Regulations

EN standard **EN 817**  
 Noise class **I (ISO3822)**

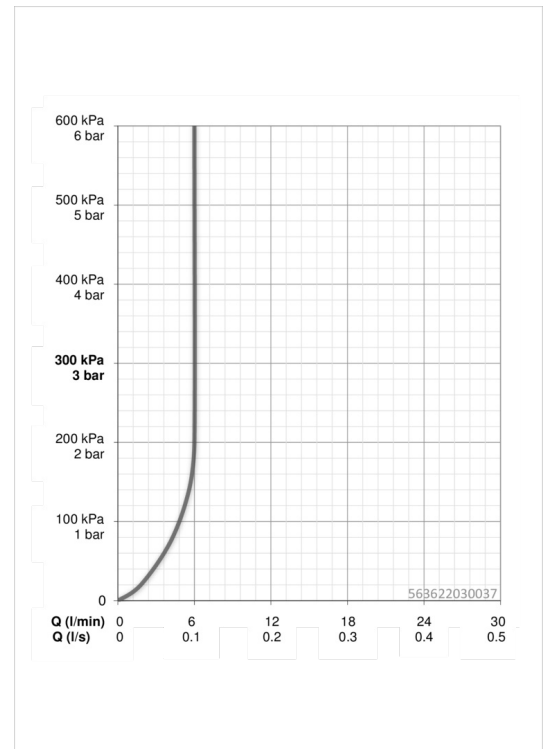

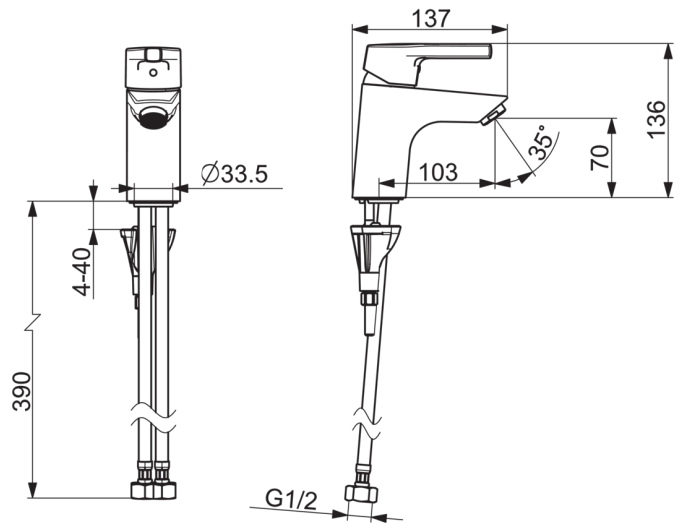

## Spare parts

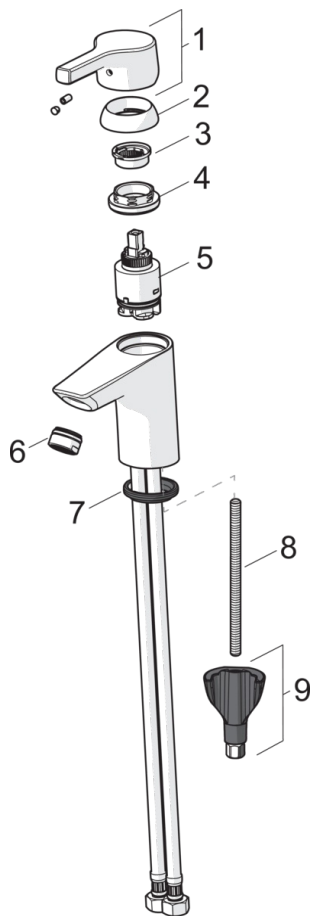

### SP56362203

	Name	Code
01	Lever	59914712
02	Covering cap, 33 x 3 mm	59912504
03	Temperature adjustment limiter	59912325
04	Tightening nut, M40x1, SW30	59913210
05	Cartridge, 3.5 Classic	59913075
06	Aerator, M24x1, 6 l/min	59913727
06	Aerator, M24x1, Low pressure	59902692
07	Bottom seal	59914591
08	Fixing screw, M8x1, L=130	59914474
09	Fixing set	59914475
N.I.	Pop-up waste, (2019-)	59914764
N.I.	Pop-up waste	59904620
N.I.	Pop-up operating rod	59914464