

EAN: 4057304012075 static.hansa.com/56402203





#### • Washbasin

- Single-lever, Bidetta
- Deck mounted
- Chrome
- Fixed spout
- PCA® constant flow rate regardless of pressure variations
- Hot/Cold symbols, Single operating lever/handle
- Automatic reset

- Hand shower, Shower holder, Shower hose (1500 mm)
- Bidetta hand shower
- Limitation option for maximum temperature and flow-rate, Adjustable hot water stop (included, retrofittable)
- Ø 35 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
  - Inner body made of DZR brass, 3S-installation system for safe and simple mounting
- Without pop-up waste
- protected against back-flow in domestic use (according to DIN EN 1717)









# K> HANSA

## **Technical data**

Flow properties		
Flow-rate at 3 bar	9.0 l/min	
Flow-rate at 3 bar (with flow controller)	6.0 l/min	
Technical properties		
DN-size (nominal dimension)	DN15	
Hot water supply	max. +70°C	
Working pressure	0.5-10 bar	
Connection size	G3/8	
Projection	103 mm	
Backflow prevention (EN1717)	нс	
Material	Brass	
Regulations		
EN standard	EN 817, EN 1113	
Noise class	I (ISO3822)	

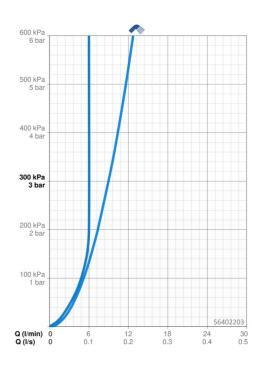

### Spare parts

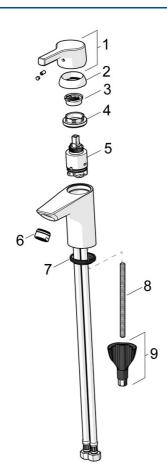

#### SP56362203

Name	Code
	couc
Lever	59914712
Covering cap, 33x3 mm	59912504
Temperature adjustment limiter	59912325
Tightening nut, M40x1	1003409V
Cartridge, 3.5 Classic	59913075
Aerator, M24x1 A, low pressure	59902692
Aerator, M24x1, 6 l/min	59913727
Bottom seal	59914591
Fixing screw, M8x1, L=130	59914474
Fixing set	59914475
	Covering cap, 33x3 mm Temperature adjustment limiter Tightening nut, M40x1 Cartridge, 3.5 Classic Aerator, M24x1 A, low pressure Aerator, M24x1, 6 l/min Bottom seal Fixing screw, M8x1, L=130