



EAN: 4057304015199
static.hansa.com/57192273

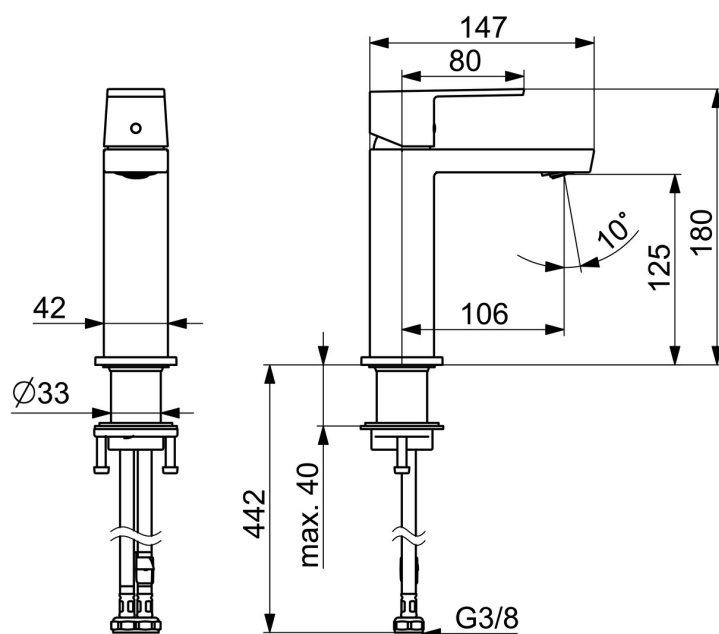

- Washbasin
- Single-lever
- Deck mounted
- Chrome
- Fixed spout
- PCA® - constant flow rate regardless of pressure variations, Adjustable flow angle
- Single operating lever/handle, Hot/Cold symbols
- \varnothing 25 mm ceramic cartridge for flow and temperature control
- Flexible inlet pipes
- Inner body made of DZR brass
- Without pop-up waste



Technical data

Flow properties

Flow-rate at 3 bar (with flow controller)

4.8 l/min

Technical properties

Hot water supply

max. +70°C

Working pressure

0.5-10 bar

Connection size

G3/8

Projection

106 mm

Backflow prevention (EN1717)

AA

Material

Brass

Regulations

EN standard

EN 817


Noise class

I (ISO 3822)


Approvals and Declarations

ABP

PA-IX 38025/IO

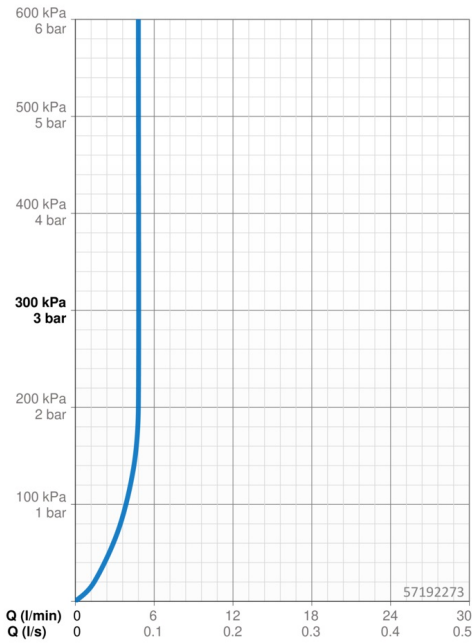

Spare parts

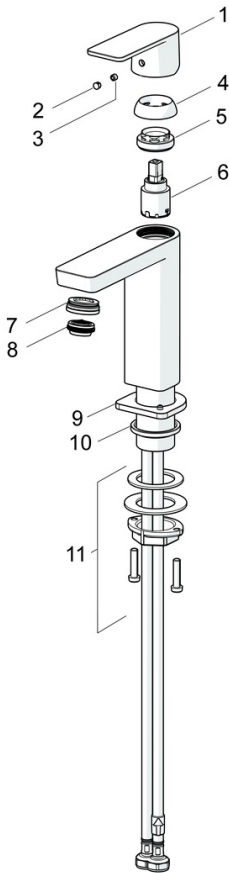

SP57192273

	Name	Code
01	Lever	1006412V
02	Cover plug	59913762
03	Screw, M5x8, SW2.5	59904755
04	Covering cap	59913957
05	Tightening nut, M32x1, SW24	59913958
06	Cartridge, 2.5	59913914
07	Fitting ring for aerator, M24x1, SW17, (2019-)	59914744
08	Aerator, M24x1 HC SSR-STD	59914015
09	Cover flange	1006394V
10	Bottom seal	59914650
11	Fixing set	59913371