



EAN: 4015474277250
static.hansa.com/64640101



- Shower solutions
- Tiptronic, Battery-operated, Thermostatic
- Wall mounted
- Chrome
- Temperature control handle, Flow control handle, Eco feature for water flow, Safety feature for water temperature
- Press pad with EcoLed
- Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Litter filter(s)
- Solenoid valve, Light indicated function(s), Low battery indicator
- Eccentric coupling(s)
- Filling time: 10 min (0 - 15 min)



Technical data

Flow properties

Flow-rate at 3 bar	13.8 l/min
--------------------	------------

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Installation width	cc150 ± 15 mm
Backflow prevention (EN1717)	EB

Software settings


Max. flow period	4 min
------------------	-------

Electronic properties

Battery	AA 1.5 V Lithium x 2
---------	----------------------


Regulations

EU Directives	C € EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	EN 1111 , EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4
Protection class	IP 55

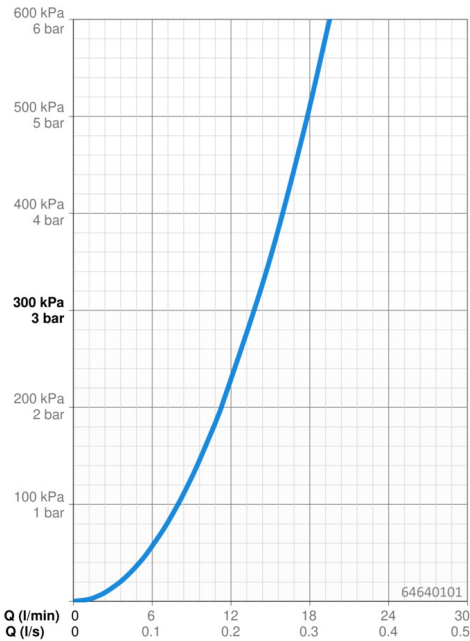

Spare parts

SP64640101

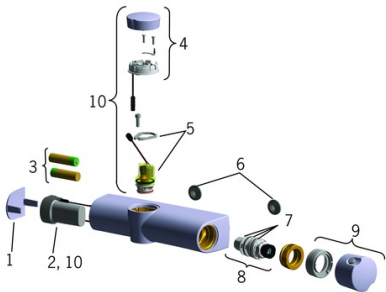

	Name	Code
01	Cover plate Discontinued	59914241
02	Control unit, 3 V	59914399
03	Battery, 1.5 V AA Lithium	59914136
04	EcoLed press pad Discontinued	59914416
05	Solenoid valve	59914366
06	Filter sealing, G3/4	59911076
07	O-ring kit	59914113
08	Thermostatic cartridge, 3.4	59914114
09	Temperature control handle Discontinued	59914242
10	Update kit	59914243