


EAN: 4015474273429
static.hansa.com/65042203



- Washbasin
- Tiptronic
- Deck mounted
- Chrome
- Fixed spout
- Hidden aerator
- Remote controlled stop valve for external equipment
- Easy-Grip surface, Hot/Cold symbols, Eco feature for water flow, Temperature control handle
- Separate electronic press pad
- Safety stop against scalding at 38°C
- Thermostatic cartridge for automatic temperature control, Litter filter(s)
- Flexible inlet pipes
- Without pop-up waste, Without draw-rod opening

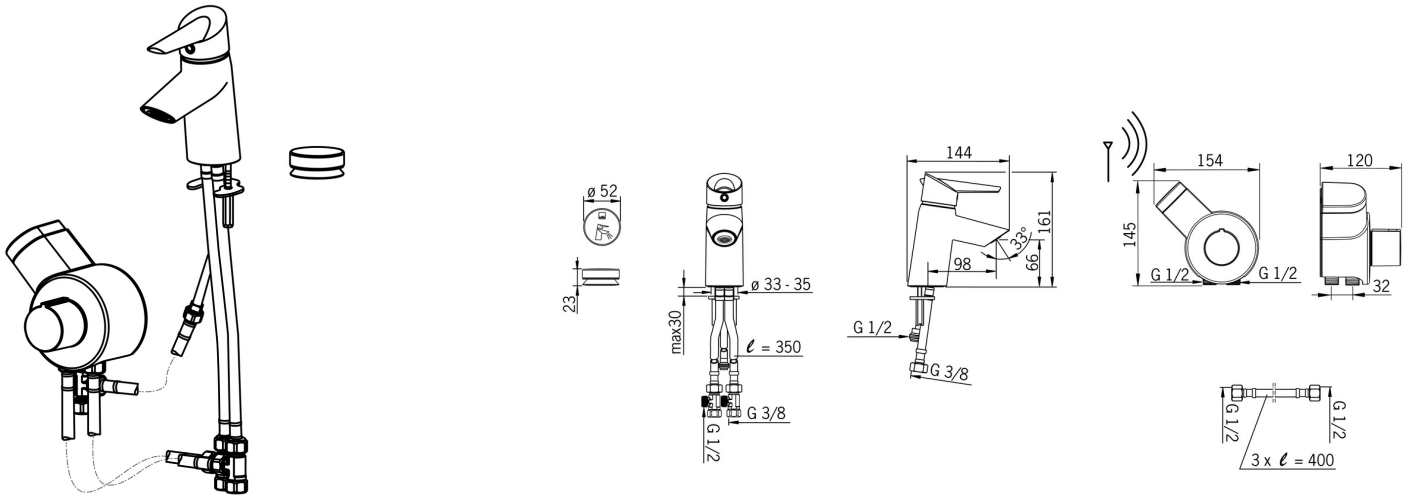

Technical data

Flow properties

Eco-flow at 3 bar	6.0 l/min
Flow-rate at 3 bar	7.8 l/min
Pressure loss with flow (0.1 l/s)	1.7 bar

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	1-10 bar
Connection size	G3/8
Projection	98 mm
Material	Brass/Plastic

Software settings

Max. flow period	6 s (4 - 15s)
------------------	---------------

Electronic properties



Battery	AA 1.5 V Lithium x 2, CR 2450 3 V
Number of devices connected	max. 8

Regulations


EU Directives	C € EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU
EN standard	EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4
Noise class	I (ISO 3822) Oras lab.
Protection class	IP 55

Approvals and Declarations

UN38.3	UN38-3 Energizer L91
--------	----------------------

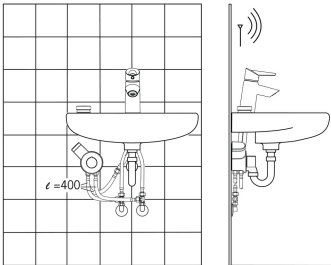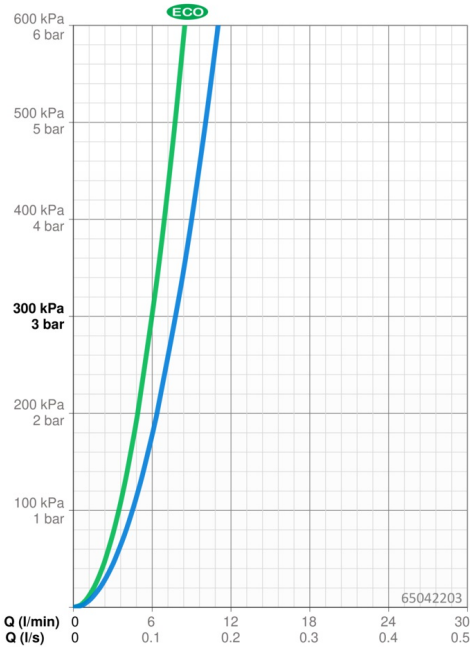

Spare parts

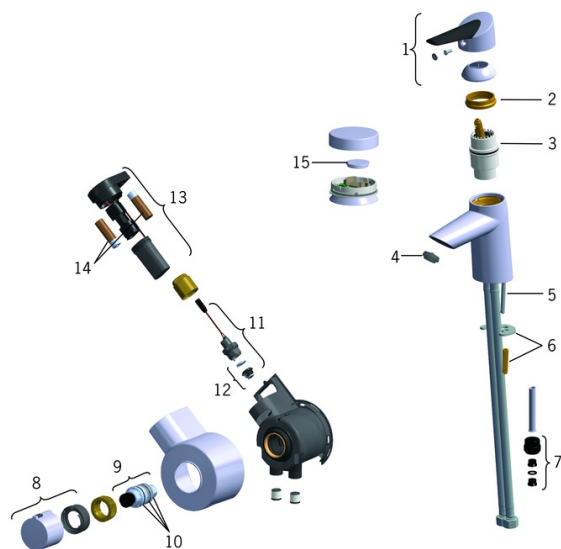

SP65042203

	Name	Code
01	Lever Discontinued	59914170
02	Tightening nut, M42x1.5, SW 38	59914128
03	Cartridge, 4.0 Classic	59914129
04	Aerator, M24x1 STD HC A	59914130
05	Fixing screw, M6x55 Discontinued	59914131
06	Fixing plates with nuts	59914132
07	Nipple Discontinued	59914133
08	Temperature control handle Discontinued	59914134
09	Thermostatic cartridge, 3.4	59914114
10	O-ring kit	59914113
11	Solenoid valve complete, 3 V	59914125
12	Membrane for solenoid valve	1006500V
12	Membrane Discontinued	59914126
13	Control unit, 3 V Discontinued	59914135
14	Battery, 1.5 V AA Lithium	59914136
15	Battery, CR2450 3 V Lithium	59914137